

Sika AnchorFix®-3030

DECLARATION OF PERFORMANCE

No. 68247540

1	UNIQUE IDENTIFICATION CODE OF THE PRODUCT- TYPE:	68247540
2	INTENDED USE/S	Bonded injection type anchor for use in cracked and uncracked concrete
3	MANUFACTURER:	Sika Services AG Tüffenwies 16 8064 Zürich
4	SYSTEM/S OF AVCP:	System 1
5b	EUROPEAN ASSESSMENT DOCUMENT:	EAD 330499-02-0601; edition September 2022
	European Technical Assessment:	ETA 17/0694 of 09/09/2025
	Technical Assessment Body:	Technical and Test Institute for Construction Prague
	Notified body/ies:	1020

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

6 DECLARED PERFORMANCE/S

Essential Characteristics	Performance	AVCP	Harmonised Technical Specification
Mechanical resistance and stability (BWR 1)			
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1 to C 7	System 1	
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 8 to C 10	System 1	
Displacements under short-term and long-term loading	See Annex C 11	System 1	
Characteristic resistance and displacement for seismic performance categories C1 and C2	See Annex C 12 to C 14	System 1	
Safety in case of fire (BWR 2)			
See Annex C 12 to C 14	Anchorage satisfy requirements for Class A1	System 1	
Resistance to fire	See Annex C 15 to C 16	System 1	
Hygiene, health and environment (BWR 3)	NPD	System 1	
Durability and serviceability	ensured if the specifications of intended use according to Annex B 1 are kept.	System 1	

EAD 330499-02-0601; edition September 2022

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver.2
1138

Table C1: Design method EN 1992-4

Steel failure - Characteristic values of resistance to tension load of threaded rod

Steel failure – Characteristic resistance			M8	M10	M12	M16	M20	M24	M27	M30
Size										
Steel grade 4.6	$N_{Rk,s}$	[kN]	15	23	34	63	98	141	184	224
Partial safety factor	γ_{Ms}	[-]	2,00							
Steel grade 5.8	$N_{Rk,s}$	[kN]	18	29	42	79	123	177	230	281
Partial safety factor	γ_{Ms}	[-]	1,50							
Steel grade 8.8	$N_{Rk,s}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ_{Ms}	[-]	1,50							
Steel grade 10.9	$N_{Rk,s}$	[kN]	37	58	84	157	245	353	459	561
Partial safety factor	γ_{Ms}	[-]	1,40							
Stainless steel grade A2-70, A4-70	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,87							
Stainless steel grade A4-80	$N_{Rk,s}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ_{Ms}	[-]	1,60							
Stainless steel grade 1.4529	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,50							
Stainless steel grade 1.4565	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,87							

Table C2: Design method EN 1992-4

Steel failure - Characteristic values of resistance to tension load of threaded socket

Steel failure – Characteristic resistance			M6	M8	M10	M12	M16	M20
Size								
Steel grade 4.6	$N_{Rk,s}$	[kN]	8	15	23	34	63	98
Partial safety factor	γ_{Ms}	[-]	2,00					
Steel grade 5.8	$N_{Rk,s}$	[kN]	10	18	29	42	79	123
Partial safety factor	γ_{Ms}	[-]	1,50					
Steel grade 8.8	$N_{Rk,s}$	[kN]	16	29	46	67	126	196
Partial safety factor	γ_{Ms}	[-]	1,50					
Steel grade 10.9	$N_{Rk,s}$	[kN]	20	37	58	84	157	245
Partial safety factor	γ_{Ms}	[-]	1,40					
Stainless steel grade A2-70, A4-70	$N_{Rk,s}$	[kN]	14	26	41	59	110	172
Partial safety factor	γ_{Ms}	[-]	1,87					
Stainless steel grade A4-80	$N_{Rk,s}$	[kN]	16	29	46	67	126	196
Partial safety factor	γ_{Ms}	[-]	1,60					
Stainless steel grade 1.4529	$N_{Rk,s}$	[kN]	14	26	41	59	110	172
Partial safety factor	γ_{Ms}	[-]	1,50					
Stainless steel grade 1.4565	$N_{Rk,s}$	[kN]	14	26	41	59	110	172
Partial safety factor	γ_{Ms}	[-]	1,87					

Table C3: Design method EN 1992-4

Steel failure - Characteristic values of resistance to tension load of rebar

Steel failure – Characteristic resistance			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Size									
Rebar BSt 500 S	$N_{Rk,s}$	[kN]	28	43	62	111	173	270	442
Partial safety factor	γ_{Ms}	[-]	1,4						

Sika AnchorFix®-3030

Performances

Steel failure characteristic resistance

Annex C 1

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C4: Design method EN 1992-4

Characteristic values of resistance to tension load of threaded rod

Hammer drilling, Dustless drilling										
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years										
Size			M8	M10	M12	M16	M20	M24	M27	M30
Characteristic bond resistance in uncracked concrete										
Temperature T3: 50°C / 70°C	$\tau_{Rk,ucr}$	[N/mm ²]	17,1	14,8	14,8	12,2	12,2	12,2	10,7	9,6
Temperature T4: 55°C / 75°C	$\tau_{Rk,ucr}$	[N/mm ²]	16,6	14,3	14,3	11,8	11,8	11,8	10,4	9,3
Installation safety factor										
Dry, wet concrete	γ_{inst}	[-]	1,0							
Hammer drilling – Flooded hole	γ_{inst}	[-]	1,0							
Dustless drilling – Flooded hole	γ_{inst}	[-]	1,2							
Characteristic bond resistance in cracked concrete										
Temperature T3: 50°C / 70°C	$\tau_{Rk,ucr}$	[N/mm ²]	9,7	9,7	9,7	9,5	9,1	8,8	6,2	6,1
Temperature T4: 55°C / 75°C	$\tau_{Rk,ucr}$	[N/mm ²]	9,4	9,4	9,4	9,2	8,8	8,5	6,0	5,9
Installation safety factor										
Dry, wet concrete	γ_{inst}	[-]	1,0							
Hammer drilling – Flooded hole	γ_{inst}	[-]	1,0							
Dustless drilling – Flooded hole	γ_{inst}	[-]	1,2							
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ^{0}_{sus}	[-]	0,72						
	T4: 55°C / 75°C			1,00						
Factor for concrete	C25/30	ψ_c	[-]	1,02						
	C30/37			1,04						
	C35/45			1,06						
	C40/50			1,07						
	C45/55			1,08						
	C50/60			1,09						
Concrete cone failure										
Factor for concrete cone failure for uncracked concrete	$k_{ucr,N}$	[-]	11							
Factor for concrete cone failure for cracked concrete	$k_{cr,N}$		7,7							
Edge distance	$C_{cr,N}$	[mm]	1,5h _{ef}							
Splitting failure										
Size			M8	M10	M12	M16	M20	M24	M27	M30
Edge distance	$C_{cr,sp}$	[mm]	2 • h _{ef}							
Spacing	$S_{cr,sp}$	[mm]	2 • C _{cr,sp}							

Sika AnchorFix®-3030

Performances

Hammer drilling, Dustless drilling

Characteristic resistance for tension loads - threaded rod

Annex C 2**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C5: Design method EN 1992-4

Characteristic values of resistance to tension load of threaded socket

Hammer drilling, Dustless drilling								
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years								
Size		M6	M8	M10	M12	M16	M20	
Nominal external diameter of socket		M10	M12	M16	M20	M24	M30	
Characteristic bond resistance in uncracked concrete								
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$ [N/mm ²]	14,8	14,8	12,2	12,2	9,6	
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$ [N/mm ²]	14,3	14,3	11,8	11,8	9,3	
Installation safety factor								
Dry, wet concrete		γ_{inst} [-]	1,0					
Hammer drilling – Flooded hole		γ_{inst} [-]	1,0					
Dustless drilling – Flooded hole		γ_{inst} [-]	1,2					
Characteristic bond resistance in cracked concrete								
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$ [N/mm ²]	9,7	9,7	9,5	9,1	8,8	6,1
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$ [N/mm ²]	9,4	9,4	9,2	8,8	8,5	5,9
Installation safety factor								
Dry, wet concrete		γ_{inst} [-]	1,0					
Hammer drilling – Flooded hole		γ_{inst} [-]	1,0					
Dustless drilling – Flooded hole		γ_{inst} [-]	1,2					
Factor for influence of sustained load for a working life 50 years		T3: 50°C / 70°C T4: 55°C / 75°C	$\psi_{0,sus}$ [-]	0,72 1,00				
Factor for concrete		C25/30 C30/37 C35/45 C40/50 C45/55 C50/60	ψ_c [-]	1,02 1,04 1,06 1,07 1,08 1,09				
Concrete cone failure								
Factor for concrete cone failure for uncracked concrete		$k_{ucr,N}$	[-]	11				
Factor for concrete cone failure for cracked concrete		$k_{cr,N}$		7,7				
Edge distance		$c_{cr,N}$ [mm]	1,5 h_{ef}					
Splitting failure								
Size			M6	M8	M10	M12	M16	M20
Edge distance		$c_{cr,sp}$ [mm]	2 • h_{ef}					
Spacing		$s_{cr,sp}$ [mm]	2 • $c_{cr,sp}$					

Sika AnchorFix®-3030

Performances

Hammer drilling, Dustless drilling

Characteristic resistance for tension loads - threaded socket

Annex C 3**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C6: Design method EN 1992-4
Characteristic values of resistance to tension load of rebar

Hammer drilling, Dustless drilling									
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Characteristic bond resistance in uncracked concrete									
Temperature T3: 50°C / 70°C	$\tau_{Rk,ucr}$	[N/mm ²]	13,3	13,3	13,3	11,7	11,7	11,7	8,1
Temperature T4: 55°C / 75°C	$\tau_{Rk,ucr}$	[N/mm ²]	12,9	12,9	12,9	11,3	11,3	11,3	7,8
Installation safety factor									
Hammer drilling - Dry, wet concrete	γ_{inst}	[-]	1,0						
Dustless drilling - Dry, wet concrete	γ_{inst}	[-]	1,2						
Flooded hole	γ_{inst}	[-]	1,2						
Characteristic bond resistance in cracked concrete									
Temperature T3: 50°C / 70°C	$\tau_{Rk,ucr}$	[N/mm ²]	8,1	11,4	10,7	10,4	9,9	8,6	6,4
Temperature T4: 55°C / 75°C	$\tau_{Rk,ucr}$	[N/mm ²]	7,8	11,0	10,3	10,1	9,6	8,4	6,2
Installation safety factor									
Hammer drilling - Dry, wet concrete	γ_{inst}	[-]	1,0						
Dustless drilling - Dry, wet concrete	γ_{inst}	[-]	1,2						
Flooded hole	γ_{inst}	[-]	1,2						
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ_{sus}^0	[-]	0,72					
	T4: 55°C / 75°C			1,00					
Factor for concrete	C25/30	ψ_c	[-]	1,02					
	C30/37			1,04					
	C35/45			1,06					
	C40/50			1,07					
	C45/55			1,08					
	C50/60			1,09					
Concrete cone failure									
Factor for concrete cone failure for uncracked concrete	$k_{ucr,N}$	[-]	11						
Factor for concrete cone failure for cracked concrete	$k_{cr,N}$		7,7						
Edge distance	$c_{cr,N}$	[mm]	1,5h _{ef}						
Splitting failure									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Edge distance	$c_{cr,sp}$	[mm]	2 • h _{ef}						
Spacing	$s_{cr,sp}$	[mm]	2 • c _{cr,sp}						

Sika AnchorFix®-3030

Performances

Hammer drilling, Dustless drilling
Characteristic resistance for tension loads - rebar

Annex C 4

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C7: Design method EN 1992-4

Characteristic values of resistance to tension load of threaded rod

Diamond core drilling											
Combined pullout and concrete cone failure in concrete C20/25											
Size			M8	M10	M12	M16	M20	M24	M27	M30	
Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years											
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$	[N/mm²]	16,1	14,8	14,8	12,2	12,2	12,2	10,7	9,6
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$	[N/mm²]	15,6	14,3	14,3	11,8	11,8	11,8	10,4	9,3
Installation safety factor											
Dry, wet concrete		γ_{inst}	[-]	1,0							
Flooded hole		γ_{inst}	[-]	1,2							
Characteristic bond resistance in cracked concrete for a working life of 50 years											
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$	[N/mm²]	9,7	9,7	9,7	9,5	8,7	8,7	6,2	6,1
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$	[N/mm²]	9,4	9,4	9,4	9,2	8,4	8,4	6,0	5,9
Characteristic bond resistance in cracked concrete for a working life of 100 years											
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$	[N/mm²]	8,6	8,6	8,6	8,6	8,2	8,2	6,2	5,5
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$	[N/mm²]	8,3	8,3	8,3	8,3	7,9	7,9	6,0	5,3
Installation safety factor											
Dry, wet concrete		γ_{inst}	[-]	1,0							
Flooded hole		γ_{inst}	[-]	1,2							
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ_{sus}^0	[-]	0,76							
	T4: 55°C / 75°C			0,76							
Factor for concrete	C25/30	ψ_c	[-]	1,02							
	C30/37			1,04							
	C35/45			1,06							
	C40/50			1,07							
	C45/55			1,08							
	C50/60			1,09							
Concrete cone failure											
Factor for concrete cone failure for uncracked concrete		$k_{ucr,N}$	[-]	11							
Factor for concrete cone failure for cracked concrete		$k_{cr,N}$		7,7							
Edge distance		$c_{cr,N}$	[mm]	1,5h _{ef}							
Splitting failure											
Size			M8	M10	M12	M16	M20	M24	M27	M30	
Edge distance		$c_{cr,sp}$	[mm]	2 • h _{ef}							
Spacing		$s_{cr,sp}$	[mm]	2 • c _{cr,sp}							

Sika AnchorFix®-3030

Performances

Diamond core drilling

Characteristic resistance for tension loads - threaded rod

Annex C 5

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C8: Design method EN 1992-4

Characteristic values of resistance to tension load of threaded socket

Diamond core drilling								
Combined pullout and concrete cone failure in concrete C20/25								
Size		M6	M8	M10	M12	M16	M20	
Nominal external diameter of socket		M10	M12	M16	M20	M24	M30	
Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years								
Temperature T3: 50°C / 70°C		$f_{Rk,ucr}$ [N/mm ²]	14,8	14,8	12,2	12,2	9,6	
Temperature T4: 55°C / 75°C		$f_{Rk,ucr}$ [N/mm ²]	14,3	14,3	11,8	11,8	9,3	
Installation safety factor								
Dry, wet concrete		γ_{inst} [-]	1,0					
Flooded hole		γ_{inst} [-]	1,2					
Characteristic bond resistance in cracked concrete for a working life of 50 years								
Temperature T3: 50°C / 70°C		$f_{Rk,ucr}$ [N/mm ²]	9,7	9,7	9,5	8,7	8,7	6,1
Temperature T4: 55°C / 75°C		$f_{Rk,ucr}$ [N/mm ²]	9,4	9,4	9,2	8,4	8,4	5,9
Characteristic bond resistance in cracked concrete for a working life of 100 years								
Temperature T3: 50°C / 70°C		$f_{Rk,ucr}$ [N/mm ²]	8,6	8,6	8,6	8,2	8,2	5,5
Temperature T4: 55°C / 75°C		$f_{Rk,ucr}$ [N/mm ²]	8,3	8,3	8,3	7,9	7,9	5,3
Installation safety factor								
Dry, wet concrete		γ_{inst} [-]	1,0					
Flooded hole		γ_{inst} [-]	1,2					
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ_{sus} [-]	0,76					
	T4: 55°C / 75°C		0,76					
Factor for concrete	C25/30	ψ_c [-]	1,02					
	C30/37		1,04					
	C35/45		1,06					
	C40/50		1,07					
	C45/55		1,08					
	C50/60		1,09					
Concrete cone failure								
Factor for concrete cone failure for uncracked concrete		$k_{ucr,N}$	[-]	11				
Factor for concrete cone failure for cracked concrete		$k_{cr,N}$		7,7				
Edge distance		$c_{or,N}$ [mm]	1,5 h_{ef}					
Splitting failure								
Size		M6	M8	M10	M12	M16	M20	
Edge distance		$c_{or,sp}$ [mm]	2 • h_{ef}					
Spacing		$s_{or,sp}$ [mm]	2 • $c_{or,sp}$					

Sika AnchorFix®-3030

Performances

Diamond core drilling

Characteristic resistance for tension loads - threaded socket

Annex C 6

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C9: Design method EN 1992-4
Characteristic values of resistance to tension load of rebar

Diamond core drilling									
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Characteristic bond resistance in uncracked concrete									
Temperature T3: 50°C / 70°C	$\tau_{Rk, uor}$	[N/mm ²]	13,3	12,3	12,3	11,7	11,0	10,9	8,1
Temperature T4: 55°C / 75°C	$\tau_{Rk, uor}$	[N/mm ²]	12,9	11,9	11,9	11,9	10,7	10,5	7,8
Installation safety factor									
Dry, wet concrete	γ_{inst}	[-]	1,0						
Flooded hole	γ_{inst}	[-]	1,2						
Characteristic bond resistance in cracked concrete for a working life of 50 years									
Temperature T3: 50°C / 70°C	$\tau_{Rk, uor}$	[N/mm ²]	8,1	8,3	8,1	8,1	7,3	6,6	6,4
Temperature T4: 55°C / 75°C	$\tau_{Rk, uor}$	[N/mm ²]	7,8	8,0	7,8	7,8	7,1	6,4	6,2
Characteristic bond resistance in cracked concrete for a working life of 100 years									
Temperature T3: 50°C / 70°C	$\tau_{Rk, uor}$	[N/mm ²]	6,4	7,2	7,2	7,2	6,9	6,3	5,8
Temperature T4: 55°C / 75°C	$\tau_{Rk, uor}$	[N/mm ²]	6,2	7,0	7,0	7,0	6,7	6,1	5,6
Installation safety factor									
Dry, wet concrete	γ_{inst}	[-]	1,0						
Flooded hole	γ_{inst}	[-]	1,2						
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ_{sus}	[-]	0,76					
	T4: 55°C / 75°C			0,76					
Factor for concrete	C25/30	ψ_c	[-]	1,02					
	C30/37			1,04					
	C35/45			1,06					
	C40/50			1,07					
	C45/55			1,08					
	C50/60			1,09					
Concrete cone failure									
Factor for concrete cone failure for uncracked concrete	$k_{uor, N}$	[-]	11						
Factor for concrete cone failure for cracked concrete	$k_{cr, N}$		7,7						
Edge distance	$c_{cr, N}$	[mm]	1,5h _{ef}						
Splitting failure									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Edge distance	$c_{cr, sp}$	[mm]	2 • h _{ef}						
Spacing	$s_{cr, sp}$	[mm]	2 • c _{cr, sp}						

Sika AnchorFix®-3030

Performances

Diamond core drilling
Characteristic resistance for tension loads - rebar

Annex C 7

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C10: Design method EN 1992-4

Characteristic values of resistance to shear load of threaded rod

Steel failure without lever arm									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade 4.6	$V_{Rk,s}$ [kN]	9	14	20	38	59	85	110	135
Partial safety factor	γ_{Ms} [-]	1,67							
Steel grade 5.8	$V_{Rk,s}$ [kN]	11	17	25	47	74	106	138	168
Partial safety factor	γ_{Ms} [-]	1,25							
Steel grade 8.8	$V_{Rk,s}$ [kN]	15	23	34	63	98	141	184	224
Partial safety factor	γ_{Ms} [-]	1,25							
Steel grade 10.9	$V_{Rk,s}$ [kN]	18	29	42	79	123	177	230	281
Partial safety factor	γ_{Ms} [-]	1,5							
Stainless steel grade A2-70, A4-70	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	γ_{Ms} [-]	1,56							
Stainless steel grade A4-80	$V_{Rk,s}$ [kN]	15	23	34	63	98	141	184	224
Partial safety factor	γ_{Ms} [-]	1,33							
Stainless steel grade 1.4529	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	γ_{Ms} [-]	1,25							
Stainless steel grade 1.4565	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	γ_{Ms} [-]	1,56							
Characteristic resistance of group of fasteners									
Ductility factor $k_7 = 1,0$ for steel with rupture elongation $A_5 > 8\%$									

Steel failure with lever arm									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade 4.6	$M^o_{Rk,s}$ [N.m]	15	30	52	133	260	449	666	900
Partial safety factor	γ_{Ms} [-]	1,67							
Steel grade 5.8	$M^o_{Rk,s}$ [N.m]	19	37	66	166	325	561	832	1125
Partial safety factor	γ_{Ms} [-]	1,25							
Steel grade 8.8	$M^o_{Rk,s}$ [N.m]	30	60	105	266	519	898	1332	1799
Partial safety factor	γ_{Ms} [-]	1,25							
Steel grade 10.9	$M^o_{Rk,s}$ [N.m]	37	75	131	333	649	1123	1664	2249
Partial safety factor	γ_{Ms} [-]	1,50							
Stainless steel grade A2-70, A4-70	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	γ_{Ms} [-]	1,56							
Stainless steel grade A4-80	$M^o_{Rk,s}$ [N.m]	30	60	105	266	519	898	1332	1799
Partial safety factor	γ_{Ms} [-]	1,33							
Stainless steel grade 1.4529	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	γ_{Ms} [-]	1,25							
Stainless steel grade 1.4565	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	γ_{Ms} [-]	1,56							
Concrete pryout failure									
Factor for resistance to pry-out failure		k_8	[-]						
			2						

Concrete edge failure									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Outside diameter of fastener	d_{nom} [mm]	8	10	12	16	20	24	27	30
Effective length of fastener	ℓ_i [mm]	$\min(\ell_{ef}, 8 d_{nom})$							

Sika AnchorFix®-3030**Performances**

Design according to EN 1992-4

Characteristic resistance for shear loads - threaded rod

Annex C 8**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09, ver. 2

1138

Table C11: Design method EN 1992-4

Characteristic values of resistance to shear load of threaded socket

Steel failure without lever arm							
Size		M6	M8	M10	M12	M16	M20
Nominal external diameter of socket		M10	M12	M16	M20	M24	M30
Steel grade 4.6	$V_{Rk,s}$ [kN]	5	9	14	20	38	59
Partial safety factor	γ_{Ms} [-]	1,67					
Steel grade 5.8	$V_{Rk,s}$ [kN]	6	11	17	25	47	74
Partial safety factor	γ_{Ms} [-]	1,25					
Steel grade 8.8	$V_{Rk,s}$ [kN]	8	15	23	34	63	98
Partial safety factor	γ_{Ms} [-]	1,25					
Steel grade 10.9	$V_{Rk,s}$ [kN]	10	18	29	42	79	123
Partial safety factor	γ_{Ms} [-]	1,5					
Stainless steel grade A2-70, A4-70	$V_{Rk,s}$ [kN]	7	13	20	30	55	86
Partial safety factor	γ_{Ms} [-]	1,56					
Stainless steel grade A4-80	$V_{Rk,s}$ [kN]	8	15	23	34	63	98
Partial safety factor	γ_{Ms} [-]	1,33					
Stainless steel grade 1.4529	$V_{Rk,s}$ [kN]	7	13	20	30	55	86
Partial safety factor	γ_{Ms} [-]	1,25					
Stainless steel grade 1.4565	$V_{Rk,s}$ [kN]	7	13	20	30	55	86
Partial safety factor	γ_{Ms} [-]	1,56					
Characteristic resistance of group of fasteners							
Ductility factor $k_7 = 1,0$ for steel with rupture elongation $A_5 > 8\%$							

Steel failure with lever arm								
Size			M6	M8	M10	M12	M16	M20
Nominal external diameter of socket			M10	M12	M16	M20	M24	M30
Steel grade 4.6	$M^o_{Rk,s}$ [N.m]		6	15	30	52	133	260
Partial safety factor	γ_{Ms} [-]		1,67					
Steel grade 5.8	$M^o_{Rk,s}$ [N.m]		8	19	37	66	166	325
Partial safety factor	γ_{Ms} [-]		1,25					
Steel grade 8.8	$M^o_{Rk,s}$ [N.m]		12	30	60	105	266	519
Partial safety factor	γ_{Ms} [-]		1,25					
Steel grade 10.9	$M^o_{Rk,s}$ [N.m]		15	37	75	131	333	649
Partial safety factor	γ_{Ms} [-]		1,50					
Stainless steel grade A2-70, A4-70	$M^o_{Rk,s}$ [N.m]		11	26	52	92	233	454
Partial safety factor	γ_{Ms} [-]		1,56					
Stainless steel grade A4-80	$M^o_{Rk,s}$ [N.m]		12	30	60	105	266	519
Partial safety factor	γ_{Ms} [-]		1,33					
Stainless steel grade 1.4529	$M^o_{Rk,s}$ [N.m]		11	26	52	92	233	454
Partial safety factor	γ_{Ms} [-]		1,25					
Stainless steel grade 1.4565	$M^o_{Rk,s}$ [N.m]		11	26	52	92	233	454
Partial safety factor	γ_{Ms} [-]		1,56					
Concrete pryout failure								
Factor for resistance to pry-out failure	k_8 [-]		2					

Concrete edge failure							
Size		M6	M8	M10	M12	M16	M20
Nominal external diameter of socket		M10	M12	M16	M20	M24	M30
Outside diameter of fastener	d_{nom} [mm]	10	12	16	20	24	30
Effective length of fastener	l_f [mm]	$\min(h_{ef}, 8 d_{nom})$					

Sika AnchorFix®-3030**Performances**

Design according to EN 1992-4

Characteristic resistance for shear loads - threaded socket

Annex C 9**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09, ver. 2

1138

Table C12: Design method EN 1992-4

Characteristic values of resistance to shear load of rebar

Steel failure without lever arm								
Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	$V_{Rk,s}$ [kN]	14	22	31	55	86	135	221
Partial safety factor	γ_{Ms} [-]	1,5						
Characteristic resistance of group of fasteners								
Ductility factor	$k_7 = 1.0$ for steel with rupture elongation $A_5 > 8\%$							

Steel failure with lever arm								
Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	$M^{o}_{Rk,S}$ [N.m]	33	65	112	265	518	1013	2122
Partial safety factor	γ_{Ms} [-]	1,5						
Concrete pryout failure								
Factor for resistance to pry-out failure	k_{sp} [-]	2						

Concrete edge failure								
Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Outside diameter of fastener	d_{nom} [mm]	8	10	12	16	20	25	32
Effective length of fastener	l_f [mm]	$\min(h_{ef}, 8 d_{nom})$						

Sika AnchorFix®-3030**Performances**

Design according to EN 1992-4

Characteristic resistance for shear loads - rebar

Annex C 10**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C13: Displacement of threaded rod under tension and shear load
Hammer drilling, dustless drilling

Size		M8	M10	M12	M16	M20	M24	M27	M30
Tension load									
Uncracked concrete									
δ_{N0}	[mm/kN]	0,03	0,02	0,02	0,02	0,01	0,01	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,05	0,04	0,03	0,03	0,02	0,02	0,01	0,01
Cracked concrete									
δ_{N0}	[mm/kN]	0,05	0,04	0,03	0,03	0,02	0,02	0,02	0,02
$\delta_{N\infty}$	[mm/kN]	0,35	0,21	0,14	0,12	0,08	0,07	0,07	0,07
Shear load									
δ_{V0}	[mm/kN]	0,71	0,45	0,31	0,17	0,11	0,07	0,06	0,05
$\delta_{V\infty}$	[mm/kN]	1,06	0,67	0,46	0,25	0,16	0,11	0,08	0,07

Table C14: Displacement of threaded rod under tension and shear load
Diamond core drilling

Size		M8	M10	M12	M16	M20	M24	M27	M30
Tension load									
Uncracked concrete									
δ_{N0}	[mm/kN]	0,01	0,01	0,02	0,02	0,02	0,02	0,01	0,02
$\delta_{N\infty}$	[mm/kN]	0,09	0,07	0,05	0,04	0,03	0,02	0,02	0,02
Cracked concrete									
δ_{N0}	[mm/kN]	0,03	0,04	0,04	0,04	0,03	0,03	0,04	0,04
$\delta_{N\infty}$	[mm/kN]	0,33	0,28	0,20	0,14	0,12	0,09	0,09	0,08
Shear load									
δ_{V0}	[mm/kN]	0,71	0,45	0,31	0,17	0,11	0,07	0,06	0,05
$\delta_{V\infty}$	[mm/kN]	1,06	0,67	0,46	0,25	0,16	0,11	0,08	0,07

Table C15: Displacement of rebar under tension and shear load
Hammer drilling, dustless drilling

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Tension load								
Uncracked concrete								
δ_{N0}	[mm/kN]	0,04	0,03	0,02	0,01	0,01	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,08	0,05	0,04	0,02	0,02	0,01	0,01
Cracked concrete								
δ_{N0}	[mm/kN]	0,05	0,04	0,03	0,03	0,02	0,02	0,02
$\delta_{N\infty}$	[mm/kN]	0,35	0,21	0,17	0,11	0,08	0,07	0,06
Shear load								
δ_{V0}	[mm/kN]	0,38	0,24	0,17	0,10	0,06	0,04	0,02
$\delta_{V\infty}$	[mm/kN]	0,56	0,36	0,25	0,14	0,09	0,06	0,04

Table C16: Displacement of rebar under tension and shear load
Diamond drilling

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Tension load								
Uncracked concrete								
δ_{N0}	[mm/kN]	0,02	0,02	0,02	0,01	0,01	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,09	0,06	0,04	0,03	0,02	0,01	0,01
Cracked concrete								
δ_{N0}	[mm/kN]	0,04	0,03	0,03	0,02	0,02	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,39	0,26	0,18	0,10	0,07	0,04	0,03
Shear load								
δ_{V0}	[mm/kN]	0,38	0,24	0,17	0,10	0,06	0,04	0,02
$\delta_{V\infty}$	[mm/kN]	0,56	0,36	0,25	0,14	0,09	0,06	0,04

Sika AnchorFix®-3030

Performances
Displacements

Annex C 11

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C17: Seismic performance category C1 of threaded rod - Hammer drilling, Dustless drilling

Size			M8	M10	M12	M16	M20	M24	M27	M30
Tension load										
Steel failure										
Characteristic resistance grade 4.6	$N_{Rk,s,C1}$	[kN]	15	23	34	63	98	141	184	224
Partial safety factor	γ_{Ms}	[-]	2,00							
Characteristic resistance grade 5.8	$N_{Rk,s,C1}$	[kN]	18	29	42	79	123	177	230	281
Partial safety factor	γ_{Ms}	[-]	1,50							
Characteristic resistance grade 8.8	$N_{Rk,s,C1}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ_{Ms}	[-]	1,50							
Characteristic resistance grade 10.9	$N_{Rk,s,C1}$	[kN]	37	58	84	157	245	353	459	561
Partial safety factor	γ_{Ms}	[-]	1,40							
Characteristic resistance A2-70, A4-70	$N_{Rk,s,C1}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,87							
Characteristic resistance A4-80	$N_{Rk,s,C1}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ_{Ms}	[-]	1,60							
Characteristic resistance 1.4529	$N_{Rk,s,C1}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,50							
Characteristic resistance 1.4565	$N_{Rk,s,C1}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,87							
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years										
Characteristic bond resistance										
Temperature T3: 50°C / 70°C	$TR_{k,p,C1}$	[N/mm ²]	9,4	8,5	10,0	8,7	7,4	7,7	5,7	4,9
Temperature T4: 55°C / 75°C	$TR_{k,p,C1}$	[N/mm ²]	9,1	8,2	10,0	8,4	7,2	7,5	5,5	4,7
Installation safety factor										
Dry, wet concrete	γ_{inst}	[-]	1,0							
Hammer drilling – Flooded hole	γ_{inst}	[-]	1,0							
Dustless drilling – Flooded hole	γ_{inst}	[-]	1,2							
Shear load										
Steel failure without lever arm										
Characteristic resistance grade 4.6	$V_{Rk,s,C1}$	[kN]	5	9	13	20	32	28	37	45
Partial safety factor	γ_{Ms}	[-]	1,67							
Characteristic resistance grade 5.8	$V_{Rk,s,C1}$	[kN]	7	11	16	26	40	35	46	56
Partial safety factor	γ_{Ms}	[-]	1,25							
Characteristic resistance grade 8.8	$V_{Rk,s,C1}$	[kN]	11	17	25	41	64	56	73	90
Partial safety factor	γ_{Ms}	[-]	1,25							
Characteristic resistance grade 10.9	$V_{Rk,s,C1}$	[kN]	14	22	32	51	80	71	92	112
Partial safety factor	γ_{Ms}	[-]	1,50							
Characteristic resistance A2-70, A4-70	$V_{Rk,s,C1}$	[kN]	10	15	22	36	56	49	64	79
Partial safety factor	γ_{Ms}	[-]	1,56							
Characteristic resistance A4-80	$V_{Rk,s,C1}$	[kN]	11	17	25	41	64	56	73	90
Partial safety factor	γ_{Ms}	[-]	1,33							
Characteristic resistance 1.4529	$V_{Rk,s,C1}$	[kN]	10	15	22	36	56	49	64	79
Partial safety factor	γ_{Ms}	[-]	1,25							
Characteristic resistance 1.4565	$V_{Rk,s,C1}$	[kN]	10	15	22	36	56	49	64	79
Partial safety factor	γ_{Ms}	[-]	1,56							
Characteristic shear load resistance $V_{Rk,s,eq}$ in the Table C13 shall be multiplied by following reduction factor for hot-dip galvanized commercial standard rods										
Reduction factor for hot-dip galvanized rods	$\alpha_{v,h-dg,c1}$	[-]	0,47	0,47	0,47	0,54	0,54	0,88	0,88	0,88
Factor for annular gap without filling gap	α_{gap}	[-]	0,5							
Factor for annular gap with filling gap	α_{gap}	[-]	1,0							

The anchor shall be used with minimum rupture elongation after fracture $A_5 \geq 9\%$.

Sika AnchorFix®-3030

Performances

Hammer drilling, Dustless drilling

Seismic performance category C1 of threaded rod

Annex C 12

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C18: Seismic performance category C1 of rebar - Hammer drilling, Dustless drilling

Size			Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Tension load								
Steel failure								
Rebar BST 500 S	$N_{Rk,s,C1}$	[kN]	43	62	111	173	270	442
Partial safety factor	γ_{Ms}	[-]	1,4					
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years								
Characteristic bond resistance								
Temperature T3: 50°C / 70°C	$f_{Rk,p,C1}$	[N/mm ²]	9,4	9,8	9,5	8,8	8,0	5,3
Temperature T4: 55°C / 75°C	$f_{Rk,p,C1}$	[N/mm ²]	9,1	9,5	9,2	8,5	7,7	5,2
Installation safety factor								
Hammer drilling - Dry, wet concrete	γ_{inst}	[-]	1,0					
Dustless drilling - Dry, wet concrete	γ_{inst}	[-]	1,2					
Flooded hole	γ_{inst}	[-]	1,2					
Shear load								
Steel failure without lever arm								
Rebar BST 500 S	$V_{Rk,s,C1}$	[kN]	16	23	41	69	67	111
Partial safety factor	γ_{Ms}	[-]	1,5					
Factor for annular gap without filling gap	α_{gap}	[-]	0,5					
Factor for annular gap with filling gap	α_{gap}	[-]	1,0					

Sika AnchorFix®-3030**Performances**

Hammer drilling, Dustless drilling
Seismic performance category C1 of rebar

Annex C 13**Declaration of Performance**

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C19: Seismic performance category C2 of threaded rod - Hammer drilling, Dustless drilling

Size			M12	M16	M20
Tension load					
Steel failure					
Characteristic resistance grade 4.6	$N_{Rk,s,C2}$	[kN]	34	63	98
Partial safety factor	γ_{Ms}	[-]		2,00	
Characteristic resistance grade 5.8	$N_{Rk,s,C2}$	[kN]	42	79	123
Partial safety factor	γ_{Ms}	[-]		1,50	
Characteristic resistance grade 8.8	$N_{Rk,s,C2}$	[kN]	67	126	196
Partial safety factor	γ_{Ms}	[-]		1,50	
Characteristic resistance grade 10.9	$N_{Rk,s,C2}$	[kN]	84	157	245
Partial safety factor	γ_{Ms}	[-]		1,40	
Characteristic resistance A2-70, A4-70	$N_{Rk,s,C2}$	[kN]	59	110	172
Partial safety factor	γ_{Ms}	[-]		1,87	
Characteristic resistance A4-80	$N_{Rk,s,C2}$	[kN]	67	126	196
Partial safety factor	γ_{Ms}	[-]		1,60	
Characteristic resistance 1.4529	$N_{Rk,s,C2}$	[kN]	59	110	172
Partial safety factor	γ_{Ms}	[-]		1,50	
Characteristic resistance 1.4565	$N_{Rk,s,C2}$	[kN]	59	110	172
Partial safety factor	γ_{Ms}	[-]		1,87	
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years					
Characteristic bond resistance					
Temperature T3: 50°C / 70°C	$TR_{k,p,C2}$	[N/mm ²]	3,5	4,0	4,5
Temperature T4: 55°C / 75°C	$TR_{k,p,C2}$	[N/mm ²]	3,3	3,8	4,4
Installation safety factor	γ_{inst}	[-]		1,0	
Dry and wet concrete, Flooded hole	γ_{inst}	[-]		1,0	
Dustless drilling – Flooded hole	γ_{inst}	[-]		1,2	
Shear load					
Steel failure without lever arm					
Characteristic resistance grade 4.6	$V_{Rk,s,C2}$	[kN]	13	18	28
Partial safety factor	γ_{Ms}	[-]		1,67	
Characteristic resistance grade 5.8	$V_{Rk,s,C2}$	[kN]	16	22	35
Partial safety factor	γ_{Ms}	[-]		1,25	
Characteristic resistance grade 8.8	$V_{Rk,s,C2}$	[kN]	25	36	56
Partial safety factor	γ_{Ms}	[-]		1,25	
Characteristic resistance grade 10.9	$V_{Rk,s,C2}$	[kN]	32	45	70
Partial safety factor	γ_{Ms}	[-]		1,50	
Characteristic resistance A2-70, A4-70	$V_{Rk,s,C2}$	[kN]	22	31	49
Partial safety factor	γ_{Ms}	[-]		1,56	
Characteristic resistance A4-80	$V_{Rk,s,C2}$	[kN]	25	36	56
Partial safety factor	γ_{Ms}	[-]		1,33	
Characteristic resistance 1.4529	$V_{Rk,s,C2}$	[kN]	22	31	49
Partial safety factor	γ_{Ms}	[-]		1,25	
Characteristic resistance 1.4565	$V_{Rk,s,C2}$	[kN]	22	31	49
Partial safety factor	γ_{Ms}	[-]		1,56	
Characteristic shear load resistance $V_{Rk,s,eq}$ in the Table C15 shall be multiplied by following reduction factor for hot-dip galvanized commercial standard rods					
Reduction factor for hot-dip galvanized rods	$\alpha_{v,h-dg,c2}$	[-]	0,46	0,61	0,61
Factor for annular gap without filling gap	α_{gap}	[-]		0,5	
Factor for annular gap with filling gap	α_{gap}	[-]		1,0	

Table C20: Displacement under tensile and shear load - seismic category C2 of threaded rod

Size		M12	M16	M20
$\delta_{N,C2(50\%)}$	[mm]	0,20	0,40	0,77
$\delta_{N,C2(100\%)}$	[mm]	0,76	0,74	1,68
$\delta_{V,C2(50\%)}$	[mm]	5,29	4,12	4,94
$\delta_{V,C2(100\%)}$	[mm]	10,20	9,05	10,99

The anchor shall be used with minimum rupture elongation after fracture $A_s \geq 9\%$.

Sika AnchorFix®-3030**Performances**

Hammer drilling, Dustless drilling
Seismic performance category C2 of threaded rod

Annex C 14**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Characteristic resistance to combined pull-out and concrete failure $\tau_{Rk,fi}(\theta)$ under fire exposure for threaded rods for hammer or dustless drilling

The characteristic resistance to combined pull-out and concrete failure under fire $\tau_{Rk,fi,p}(\theta)$ shall be determined according to following equation:

$$\tau_{Rk,fi,p}(\theta) = k_{fi,p}(\theta) \cdot \tau_{Rk,cr}$$


where:

$$\begin{aligned} k_{fi,p}(\theta) &= 1 && \text{for } \theta < \theta_k \\ k_{fi,p}(\theta) &= 95,988 \cdot \theta^{-1,452} \leq 1 && \text{for } \theta \leq \theta_{max} \\ k_{fi,p}(\theta) &= 0 && \text{for } \theta > \theta_{max} \end{aligned}$$

$$\begin{aligned} \theta_k &= 21^{\circ}\text{C} \\ \theta_{max} &= 326^{\circ}\text{C} \end{aligned}$$

- $\tau_{Rk,fi,p}$ = characteristic bond resistance for cracked concrete under fire exposure for given temperature (θ)
 $\tau_{Rk,cr}$ = characteristic bond resistance for cracked concrete for concrete strength class C20/25
 $k_{fi,p}(\theta)$ = reduction factor for bond resistance under fire conditions

Figure C1: Reduction factor $k_{fi,p}(\theta)$

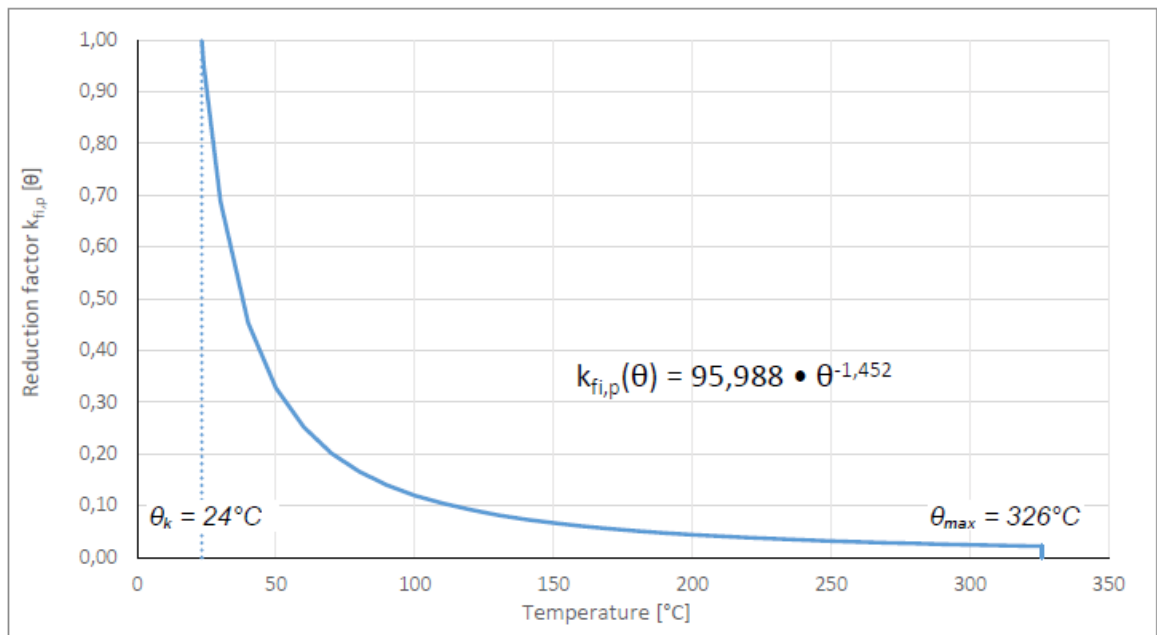

Sika AnchorFix®-3030

Performances

Bond resistance under fire conditions

Annex C 15

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C21: Steel failure - Characteristic resistance under tension load under fire conditions for threaded rod

Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade: 4.6; 5.8; 8.8; 10.9	$N_{Rk,s,fi}(30)$ [kN]	0,37	0,87	1,69	3,14	4,90	7,06	9,18	11,22
	$N_{Rk,s,fi}(60)$ [kN]	0,33	0,75	1,26	2,36	3,68	5,30	6,89	8,42
	$N_{Rk,s,fi}(90)$ [kN]	0,26	0,58	1,10	2,04	3,19	4,59	5,97	7,29
	$N_{Rk,s,fi}(120)$ [kN]	0,18	0,46	0,84	1,57	2,45	3,53	4,59	5,61
Stainless steel grade: A2-70; A4-70; A4-80 High corrosion resistant steel grade: 1.4529; 1.4565	$N_{Rk,s,fi}(30)$ [kN]	0,73	1,45	2,53	4,71	7,35	10,59	13,77	16,83
	$N_{Rk,s,fi}(60)$ [kN]	0,59	1,16	2,11	3,93	6,13	8,83	11,48	14,03
	$N_{Rk,s,fi}(90)$ [kN]	0,44	0,93	1,69	3,14	4,90	7,06	9,18	11,22
	$N_{Rk,s,fi}(120)$ [kN]	0,37	0,81	1,35	2,51	3,92	5,65	7,34	8,98

Table C22: Steel failure - Characteristic resistance under tension load under fire conditions for rebar

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	$N_{Rk,s,fi}(30)$ [kN]	0,50	1,18	2,26	4,02	6,28	9,82	16,08
	$N_{Rk,s,fi}(60)$ [kN]	0,45	1,02	1,70	3,02	4,71	7,36	12,06
	$N_{Rk,s,fi}(90)$ [kN]	0,35	0,79	1,47	2,61	4,08	6,38	10,45
	$N_{Rk,s,fi}(120)$ [kN]	0,25	0,63	1,13	2,01	3,14	4,91	8,04

Table C23: Steel failure - Characteristic resistance under shear load under fire conditions for threaded rod

Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade: 4.6; 5.8; 8.8; 10.9	$V_{Rk,s,fi}(30)$ [kN]	0,37	0,87	1,69	3,14	4,90	7,06	9,18	11,22
	$V_{Rk,s,fi}(60)$ [kN]	0,33	0,75	1,26	2,36	3,68	5,30	6,89	8,42
	$V_{Rk,s,fi}(90)$ [kN]	0,26	0,58	1,10	2,04	3,19	4,59	5,97	7,29
	$V_{Rk,s,fi}(120)$ [kN]	0,18	0,46	0,84	1,57	2,45	3,53	4,59	5,61
	$M^0_{Rk,s,fi}(30)$ [N.m]	0,4	1,1	2,6	6,7	13,0	22,5	33,3	45,0
	$M^0_{Rk,s,fi}(60)$ [N.m]	0,3	1,0	2,0	5,0	9,7	16,8	25,0	33,7
	$M^0_{Rk,s,fi}(90)$ [N.m]	0,3	0,7	1,7	4,3	8,4	14,6	21,6	29,2
	$M^0_{Rk,s,fi}(120)$ [N.m]	0,2	0,6	1,3	3,3	6,5	11,2	16,6	22,5
Stainless steel grade: A2-70; A4-70; A4-80 High corrosion resistant steel grade: 1.4529; 1.4565	$V_{Rk,s,fi}(30)$ [kN]	0,73	1,45	2,53	4,71	7,35	10,59	13,77	16,83
	$V_{Rk,s,fi}(60)$ [kN]	0,59	1,16	2,11	3,93	6,13	8,83	11,48	14,03
	$V_{Rk,s,fi}(90)$ [kN]	0,44	0,93	1,69	3,14	4,90	7,06	9,18	11,22
	$V_{Rk,s,fi}(120)$ [kN]	0,37	0,81	1,35	2,51	3,92	5,65	7,34	8,98
	$M^0_{Rk,s,fi}(30)$ [N.m]	0,7	1,9	3,9	10,0	19,5	33,7	49,9	67,5
	$M^0_{Rk,s,fi}(60)$ [N.m]	0,6	1,5	3,3	8,3	16,2	28,1	41,6	56,2
	$M^0_{Rk,s,fi}(90)$ [N.m]	0,4	1,2	2,6	6,7	13,0	22,5	33,3	45,0
	$M^0_{Rk,s,fi}(120)$ [N.m]	0,4	1,0	2,1	5,3	10,4	18,0	26,6	36,0

Table C24: Steel failure - Characteristic resistance under shear load under fire conditions for rebar

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	$V_{Rk,s,fi}(30)$ [kN]	0,50	1,18	2,26	4,02	6,28	9,82	16,08
	$V_{Rk,s,fi}(60)$ [kN]	0,45	1,02	1,70	3,02	4,71	7,36	12,06
	$V_{Rk,s,fi}(90)$ [kN]	0,35	0,79	1,47	2,61	4,08	6,38	10,45
	$V_{Rk,s,fi}(120)$ [kN]	0,25	0,63	1,13	2,01	3,14	4,91	8,04
	$M^0_{Rk,s,fi}(30)$ [N.m]	0,6	1,8	4,1	9,7	18,9	36,8	77,2
	$M^0_{Rk,s,fi}(60)$ [N.m]	0,5	1,5	3,1	7,2	14,1	27,6	57,9
	$M^0_{Rk,s,fi}(90)$ [N.m]	0,4	1,2	2,6	6,3	12,3	23,9	50,2
	$M^0_{Rk,s,fi}(120)$ [N.m]	0,3	0,9	2,0	4,8	9,4	18,4	38,6

Sika AnchorFix®-3030

Performances

Bond resistance under fire conditions

Annex C 16

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Specifications of intended use

Anchorage subject to:

- Static and quasi-static load:
 - threaded rod
 - threaded socket
 - rebar
- Seismic actions category C1 (max w = 0,5 mm):
 - threaded rod size M8, M10, M12, M16, M20, M24, M27, M30
 - rebar size Ø10, Ø12, Ø16, Ø20, Ø24, Ø25, Ø32
- Seismic actions category C2 (max w = 0,8 mm):
 - threaded rod size M12, M16, M20

Base materials

- Cracked and uncracked concrete
- Reinforced or unreinforced normal weight concrete without fibres of strength class C20/25 at minimum and C50/60 at maximum according EN 206:2013 + A2:2021.

Temperature range:

- T3: -40°C to +70°C (max. short. term temperature +70°C and max. long term temperature +50°C)
- T4: -40°C to +75°C (max. short. term temperature +75°C and max. long term temperature +55°C)

Use conditions (Environmental conditions)

- Structures subject to dry, internal conditions (all materials)
- For all other conditions according to EN 1993-1-4 corresponding to corrosion resistance class:
 - Stainless steel A2 according to Annex A 4, Table A1: CRC II
 - Stainless steel A4 according to Annex A 4, Table A1: CRC III
 - High corrosion resistance steel HCR according to Annex A 4, Table A1: CRC V

Concrete conditions:

- I1 – installation in dry or wet (water saturated) concrete and use in service in dry or wet concrete.
- I2 – installation in water-filled (not sea water) and use in service in dry or wet concrete

Design:

- The anchorages are designed in accordance with the EN 1992-4 under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings.
- Anchorages under seismic actions (cracked concrete) are designed in accordance with EN 1992-4.
- Anchorages under fire exposure are designed in accordance with EOTA TR 082.

Installation:

- Hole drilling by hammer drilling, dustless drilling or diamond core drilling mode.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Installation direction:

- D3 – downward and horizontal and upwards (e.g. overhead) installation

Sika AnchorFix®-3030	Annex B 1
Intended use Specifications	

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

**7 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR -
SPECIFIC TECHNICAL DOCUMENTATION**

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name : Tomasz Gutowski
Function: Corporate Product
Certification Manager
At Warsaw on 22 September 2025



.....

Name : Patrycja Młynarska
Function: Data Processing Specialist
Corporate Technical Department
At Warsaw on 22 September 2025



.....

End of information as required by Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC Text with EEA relevance

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

FULL CE MARKING LABEL

CE 21
Sika Services AG, Zurich, Switzerland
DoP No. 68247540
Notified Body 1020

Declaration of Performance
Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C1: Design method EN 1992-4

Steel failure - Characteristic values of resistance to tension load of threaded rod

Steel failure – Characteristic resistance			M8	M10	M12	M16	M20	M24	M27	M30
Size										
Steel grade 4.6	$N_{Rk,s}$	[kN]	15	23	34	63	98	141	184	224
Partial safety factor	γ_{Ms}	[-]	2,00							
Steel grade 5.8	$N_{Rk,s}$	[kN]	18	29	42	79	123	177	230	281
Partial safety factor	γ_{Ms}	[-]	1,50							
Steel grade 8.8	$N_{Rk,s}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ_{Ms}	[-]	1,50							
Steel grade 10.9	$N_{Rk,s}$	[kN]	37	58	84	157	245	353	459	561
Partial safety factor	γ_{Ms}	[-]	1,40							
Stainless steel grade A2-70, A4-70	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,87							
Stainless steel grade A4-80	$N_{Rk,s}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ_{Ms}	[-]	1,60							
Stainless steel grade 1.4529	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,50							
Stainless steel grade 1.4565	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,87							

Table C2: Design method EN 1992-4

Steel failure - Characteristic values of resistance to tension load of threaded socket

Steel failure – Characteristic resistance			M6	M8	M10	M12	M16	M20
Size								
Steel grade 4.6	$N_{Rk,s}$	[kN]	8	15	23	34	63	98
Partial safety factor	γ_{Ms}	[-]	2,00					
Steel grade 5.8	$N_{Rk,s}$	[kN]	10	18	29	42	79	123
Partial safety factor	γ_{Ms}	[-]	1,50					
Steel grade 8.8	$N_{Rk,s}$	[kN]	16	29	46	67	126	196
Partial safety factor	γ_{Ms}	[-]	1,50					
Steel grade 10.9	$N_{Rk,s}$	[kN]	20	37	58	84	157	245
Partial safety factor	γ_{Ms}	[-]	1,40					
Stainless steel grade A2-70, A4-70	$N_{Rk,s}$	[kN]	14	26	41	59	110	172
Partial safety factor	γ_{Ms}	[-]	1,87					
Stainless steel grade A4-80	$N_{Rk,s}$	[kN]	16	29	46	67	126	196
Partial safety factor	γ_{Ms}	[-]	1,60					
Stainless steel grade 1.4529	$N_{Rk,s}$	[kN]	14	26	41	59	110	172
Partial safety factor	γ_{Ms}	[-]	1,50					
Stainless steel grade 1.4565	$N_{Rk,s}$	[kN]	14	26	41	59	110	172
Partial safety factor	γ_{Ms}	[-]	1,87					

Table C3: Design method EN 1992-4

Steel failure - Characteristic values of resistance to tension load of rebar

Steel failure – Characteristic resistance			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Size									
Rebar BSt 500 S	$N_{Rk,s}$	[kN]	28	43	62	111	173	270	442
Partial safety factor	γ_{Ms}	[-]	1,4						

Sika AnchorFix®-3030

Performances

Steel failure characteristic resistance

Annex C 1

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C4: Design method EN 1992-4

Characteristic values of resistance to tension load of threaded rod

Hammer drilling, Dustless drilling										
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years										
Size			M8	M10	M12	M16	M20	M24	M27	M30
Characteristic bond resistance in uncracked concrete										
Temperature T3: 50°C / 70°C	$\tau_{Rk,ucr}$	[N/mm ²]	17,1	14,8	14,8	12,2	12,2	12,2	10,7	9,6
Temperature T4: 55°C / 75°C	$\tau_{Rk,ucr}$	[N/mm ²]	16,6	14,3	14,3	11,8	11,8	11,8	10,4	9,3
Installation safety factor										
Dry, wet concrete	γ_{inst}	[-]	1,0							
Hammer drilling – Flooded hole	γ_{inst}	[-]	1,0							
Dustless drilling – Flooded hole	γ_{inst}	[-]	1,2							
Characteristic bond resistance in cracked concrete										
Temperature T3: 50°C / 70°C	$\tau_{Rk,ucr}$	[N/mm ²]	9,7	9,7	9,7	9,5	9,1	8,8	6,2	6,1
Temperature T4: 55°C / 75°C	$\tau_{Rk,ucr}$	[N/mm ²]	9,4	9,4	9,4	9,2	8,8	8,5	6,0	5,9
Installation safety factor										
Dry, wet concrete	γ_{inst}	[-]	1,0							
Hammer drilling – Flooded hole	γ_{inst}	[-]	1,0							
Dustless drilling – Flooded hole	γ_{inst}	[-]	1,2							
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ_{sus}^0	[-]	0,72						
	T4: 55°C / 75°C			1,00						
Factor for concrete	C25/30	ψ_c	[-]	1,02						
	C30/37			1,04						
	C35/45			1,06						
	C40/50			1,07						
	C45/55			1,08						
	C50/60			1,09						
Concrete cone failure										
Factor for concrete cone failure for uncracked concrete	$k_{ucr,N}$	[-]	11							
Factor for concrete cone failure for cracked concrete	$k_{cr,N}$		7,7							
Edge distance	$C_{cr,N}$	[mm]	1,5h _{ef}							
Splitting failure										
Size			M8	M10	M12	M16	M20	M24	M27	M30
Edge distance	$C_{cr,sp}$	[mm]	2 • h _{ef}							
Spacing	$S_{cr,sp}$	[mm]	2 • C _{cr,sp}							

Sika AnchorFix®-3030

Performances

Hammer drilling, Dustless drilling

Characteristic resistance for tension loads - threaded rod

Annex C 2**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C5: Design method EN 1992-4

Characteristic values of resistance to tension load of threaded socket

Hammer drilling, Dustless drilling								
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years								
Size			M6	M8	M10	M12	M16	M20
Nominal external diameter of socket			M10	M12	M16	M20	M24	M30
Characteristic bond resistance in uncracked concrete								
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$ [N/mm ²]	14,8	14,8	12,2	12,2	12,2	9,6
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$ [N/mm ²]	14,3	14,3	11,8	11,8	11,8	9,3
Installation safety factor								
Dry, wet concrete		γ_{inst} [-]	1,0					
Hammer drilling – Flooded hole		γ_{inst} [-]	1,0					
Dustless drilling – Flooded hole		γ_{inst} [-]	1,2					
Characteristic bond resistance in cracked concrete								
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$ [N/mm ²]	9,7	9,7	9,5	9,1	8,8	6,1
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$ [N/mm ²]	9,4	9,4	9,2	8,8	8,5	5,9
Installation safety factor								
Dry, wet concrete		γ_{inst} [-]	1,0					
Hammer drilling – Flooded hole		γ_{inst} [-]	1,0					
Dustless drilling – Flooded hole		γ_{inst} [-]	1,2					
Factor for influence of sustained load for a working life 50 years		T3: 50°C / 70°C T4: 55°C / 75°C ψ_{sus}^0 [-]	0,72 1,00					
Factor for concrete		C25/30 C30/37 C35/45 C40/50 C45/55 C50/60 ψ_c [-]	1,02 1,04 1,06 1,07 1,08 1,09					
Concrete cone failure								
Factor for concrete cone failure for uncracked concrete		$k_{ucr,N}$	[-]	11				
Factor for concrete cone failure for cracked concrete		$k_{cr,N}$		7,7				
Edge distance		$c_{cr,N}$ [mm]	1,5 h_{ef}					
Splitting failure								
Size			M6	M8	M10	M12	M16	M20
Edge distance		$c_{cr,sp}$ [mm]	2 • h_{ef}					
Spacing		$s_{cr,sp}$ [mm]	2 • $c_{cr,sp}$					

Sika AnchorFix®-3030

Performances

Hammer drilling, Dustless drilling

Characteristic resistance for tension loads - threaded socket

Annex C 3**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C6: Design method EN 1992-4
Characteristic values of resistance to tension load of rebar

Hammer drilling, Dustless drilling									
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Characteristic bond resistance in uncracked concrete									
Temperature T3: 50°C / 70°C	$\tau_{Rk, uor}$	[N/mm ²]	13,3	13,3	13,3	11,7	11,7	11,7	8,1
Temperature T4: 55°C / 75°C	$\tau_{Rk, uor}$	[N/mm ²]	12,9	12,9	12,9	11,3	11,3	11,3	7,8
Installation safety factor									
Hammer drilling - Dry, wet concrete	γ_{inst}	[-]	1,0						
Dustless drilling - Dry, wet concrete	γ_{inst}	[-]	1,2						
Flooded hole	γ_{inst}	[-]	1,2						
Characteristic bond resistance in cracked concrete									
Temperature T3: 50°C / 70°C	$\tau_{Rk, uor}$	[N/mm ²]	8,1	11,4	10,7	10,4	9,9	8,6	6,4
Temperature T4: 55°C / 75°C	$\tau_{Rk, uor}$	[N/mm ²]	7,8	11,0	10,3	10,1	9,6	8,4	6,2
Installation safety factor									
Hammer drilling - Dry, wet concrete	γ_{inst}	[-]	1,0						
Dustless drilling - Dry, wet concrete	γ_{inst}	[-]	1,2						
Flooded hole	γ_{inst}	[-]	1,2						
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ_{sus}	[-]	0,72					
	T4: 55°C / 75°C			1,00					
Factor for concrete	C25/30	ψ_c	[-]	1,02					
	C30/37			1,04					
	C35/45			1,06					
	C40/50			1,07					
	C45/55			1,08					
	C50/60			1,09					
Concrete cone failure									
Factor for concrete cone failure for uncracked concrete	$k_{uor,N}$	[-]	11						
Factor for concrete cone failure for cracked concrete	$k_{cr,N}$		7,7						
Edge distance	$c_{or,N}$	[mm]	1,5 h_{ef}						
Splitting failure									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Edge distance	$c_{or,sp}$	[mm]	2 • h_{ef}						
Spacing	$s_{or,sp}$	[mm]	2 • $c_{or,sp}$						

Sika AnchorFix®-3030

Performances

Hammer drilling, Dustless drilling
Characteristic resistance for tension loads - rebar

Annex C 4

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C7: Design method EN 1992-4

Characteristic values of resistance to tension load of threaded rod

Diamond core drilling											
Combined pullout and concrete cone failure in concrete C20/25											
Size			M8	M10	M12	M16	M20	M24	M27	M30	
Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years											
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$	[N/mm ²]	16,1	14,8	14,8	12,2	12,2	12,2	10,7	9,6
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$	[N/mm ²]	15,6	14,3	14,3	11,8	11,8	11,8	10,4	9,3
Installation safety factor											
Dry, wet concrete		γ_{inst}	[-]	1,0							
Flooded hole		γ_{inst}	[-]	1,2							
Characteristic bond resistance in cracked concrete for a working life of 50 years											
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$	[N/mm ²]	9,7	9,7	9,7	9,5	8,7	8,7	6,2	6,1
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$	[N/mm ²]	9,4	9,4	9,4	9,2	8,4	8,4	6,0	5,9
Characteristic bond resistance in cracked concrete for a working life of 100 years											
Temperature T3: 50°C / 70°C		$\tau_{Rk,ucr}$	[N/mm ²]	8,6	8,6	8,6	8,6	8,2	8,2	6,2	5,5
Temperature T4: 55°C / 75°C		$\tau_{Rk,ucr}$	[N/mm ²]	8,3	8,3	8,3	8,3	7,9	7,9	6,0	5,3
Installation safety factor											
Dry, wet concrete		γ_{inst}	[-]	1,0							
Flooded hole		γ_{inst}	[-]	1,2							
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ_{sus}^0	[-]	0,76							
	T4: 55°C / 75°C			0,76							
Factor for concrete	C25/30	ψ_c	[-]	1,02							
	C30/37			1,04							
	C35/45			1,06							
	C40/50			1,07							
	C45/55			1,08							
	C50/60			1,09							
Concrete cone failure											
Factor for concrete cone failure for uncracked concrete		$k_{ucr,N}$	[-]	11							
Factor for concrete cone failure for cracked concrete		$k_{cr,N}$		7,7							
Edge distance		$c_{cr,N}$	[mm]	1,5h _{ef}							
Splitting failure											
Size			M8	M10	M12	M16	M20	M24	M27	M30	
Edge distance		$c_{cr,sp}$	[mm]	2 • h _{ef}							
Spacing		$s_{cr,sp}$	[mm]	2 • c _{cr,sp}							

Sika AnchorFix®-3030

Performances

Diamond core drilling

Characteristic resistance for tension loads - threaded rod

Annex C 5

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C8: Design method EN 1992-4

Characteristic values of resistance to tension load of threaded socket

Diamond core drilling								
Combined pullout and concrete cone failure in concrete C20/25								
Size		M6	M8	M10	M12	M16	M20	
Nominal external diameter of socket		M10	M12	M16	M20	M24	M30	
Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years								
Temperature T3: 50°C / 70°C		$f_{Rk,ucr}$ [N/mm ²]	14,8	14,8	12,2	12,2	9,6	
Temperature T4: 55°C / 75°C		$f_{Rk,ucr}$ [N/mm ²]	14,3	14,3	11,8	11,8	9,3	
Installation safety factor								
Dry, wet concrete		γ_{inst} [-]	1,0					
Flooded hole		γ_{inst} [-]	1,2					
Characteristic bond resistance in cracked concrete for a working life of 50 years								
Temperature T3: 50°C / 70°C		$f_{Rk,ucr}$ [N/mm ²]	9,7	9,7	9,5	8,7	8,7	6,1
Temperature T4: 55°C / 75°C		$f_{Rk,ucr}$ [N/mm ²]	9,4	9,4	9,2	8,4	8,4	5,9
Characteristic bond resistance in cracked concrete for a working life of 100 years								
Temperature T3: 50°C / 70°C		$f_{Rk,ucr}$ [N/mm ²]	8,6	8,6	8,6	8,2	8,2	5,5
Temperature T4: 55°C / 75°C		$f_{Rk,ucr}$ [N/mm ²]	8,3	8,3	8,3	7,9	7,9	5,3
Installation safety factor								
Dry, wet concrete		γ_{inst} [-]	1,0					
Flooded hole		γ_{inst} [-]	1,2					
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ^{0}_{sus} [-]	0,76					
	T4: 55°C / 75°C		0,76					
Factor for concrete	C25/30	ψ_c [-]	1,02					
	C30/37		1,04					
	C35/45		1,06					
	C40/50		1,07					
	C45/55		1,08					
	C50/60		1,09					
Concrete cone failure								
Factor for concrete cone failure for uncracked concrete		$k_{ucr,N}$	[-]	11				
Factor for concrete cone failure for cracked concrete		$k_{cr,N}$		7,7				
Edge distance		$c_{or,N}$ [mm]	1,5 h_{ef}					
Splitting failure								
Size		M6	M8	M10	M12	M16	M20	
Edge distance		$c_{or,sp}$ [mm]	2 • h_{ef}					
Spacing		$s_{or,sp}$ [mm]	2 • $c_{or,sp}$					

Sika AnchorFix®-3030

Performances

Diamond core drilling

Characteristic resistance for tension loads - threaded socket

Annex C 6

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C9: Design method EN 1992-4
Characteristic values of resistance to tension load of rebar

Diamond core drilling									
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Characteristic bond resistance in uncracked concrete									
Temperature T3: 50°C / 70°C	$\tau_{Rk,ur}$	[N/mm ²]	13,3	12,3	12,3	11,7	11,0	10,9	8,1
Temperature T4: 55°C / 75°C	$\tau_{Rk,ur}$	[N/mm ²]	12,9	11,9	11,9	11,9	10,7	10,5	7,8
Installation safety factor									
Dry, wet concrete	γ_{inst}	[-]	1,0						
Flooded hole	γ_{inst}	[-]	1,2						
Characteristic bond resistance in cracked concrete for a working life of 50 years									
Temperature T3: 50°C / 70°C	$\tau_{Rk,ur}$	[N/mm ²]	8,1	8,3	8,1	8,1	7,3	6,6	6,4
Temperature T4: 55°C / 75°C	$\tau_{Rk,ur}$	[N/mm ²]	7,8	8,0	7,8	7,8	7,1	6,4	6,2
Characteristic bond resistance in cracked concrete for a working life of 100 years									
Temperature T3: 50°C / 70°C	$\tau_{Rk,ur}$	[N/mm ²]	6,4	7,2	7,2	7,2	6,9	6,3	5,8
Temperature T4: 55°C / 75°C	$\tau_{Rk,ur}$	[N/mm ²]	6,2	7,0	7,0	7,0	6,7	6,1	5,6
Installation safety factor									
Dry, wet concrete	γ_{inst}	[-]	1,0						
Flooded hole	γ_{inst}	[-]	1,2						
Factor for influence of sustained load for a working life 50 years	T3: 50°C / 70°C	ψ_{sus}	[-]	0,76					
	T4: 55°C / 75°C			0,76					
Factor for concrete	C25/30	ψ_c	[-]	1,02					
	C30/37			1,04					
	C35/45			1,06					
	C40/50			1,07					
	C45/55			1,08					
	C50/60			1,09					
Concrete cone failure									
Factor for concrete cone failure for uncracked concrete	$k_{ur,N}$	[-]	11						
Factor for concrete cone failure for cracked concrete	$k_{cr,N}$		7,7						
Edge distance	$c_{cr,N}$	[mm]	1,5h _{ef}						
Splitting failure									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Edge distance	$c_{cr,sp}$	[mm]	2 • h _{ef}						
Spacing	$s_{cr,sp}$	[mm]	2 • c _{cr,sp}						

Sika AnchorFix®-3030

Performances

Diamond core drilling
Characteristic resistance for tension loads - rebar

Annex C 7

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C10: Design method EN 1992-4

Characteristic values of resistance to shear load of threaded rod

Steel failure without lever arm									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade 4.6	$V_{Rk,s}$ [kN]	9	14	20	38	59	85	110	135
Partial safety factor	γ_{Ms} [-]	1,67							
Steel grade 5.8	$V_{Rk,s}$ [kN]	11	17	25	47	74	106	138	168
Partial safety factor	γ_{Ms} [-]	1,25							
Steel grade 8.8	$V_{Rk,s}$ [kN]	15	23	34	63	98	141	184	224
Partial safety factor	γ_{Ms} [-]	1,25							
Steel grade 10.9	$V_{Rk,s}$ [kN]	18	29	42	79	123	177	230	281
Partial safety factor	γ_{Ms} [-]	1,5							
Stainless steel grade A2-70, A4-70	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	γ_{Ms} [-]	1,56							
Stainless steel grade A4-80	$V_{Rk,s}$ [kN]	15	23	34	63	98	141	184	224
Partial safety factor	γ_{Ms} [-]	1,33							
Stainless steel grade 1.4529	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	γ_{Ms} [-]	1,25							
Stainless steel grade 1.4565	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	γ_{Ms} [-]	1,56							
Characteristic resistance of group of fasteners									
Ductility factor $k_7 = 1,0$ for steel with rupture elongation $A_5 > 8\%$									

Steel failure with lever arm									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade 4.6	$M^o_{Rk,s}$ [N.m]	15	30	52	133	260	449	666	900
Partial safety factor	γ_{Ms} [-]	1,67							
Steel grade 5.8	$M^o_{Rk,s}$ [N.m]	19	37	66	166	325	561	832	1125
Partial safety factor	γ_{Ms} [-]	1,25							
Steel grade 8.8	$M^o_{Rk,s}$ [N.m]	30	60	105	266	519	898	1332	1799
Partial safety factor	γ_{Ms} [-]	1,25							
Steel grade 10.9	$M^o_{Rk,s}$ [N.m]	37	75	131	333	649	1123	1664	2249
Partial safety factor	γ_{Ms} [-]	1,50							
Stainless steel grade A2-70, A4-70	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	γ_{Ms} [-]	1,56							
Stainless steel grade A4-80	$M^o_{Rk,s}$ [N.m]	30	60	105	266	519	898	1332	1799
Partial safety factor	γ_{Ms} [-]	1,33							
Stainless steel grade 1.4529	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	γ_{Ms} [-]	1,25							
Stainless steel grade 1.4565	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	γ_{Ms} [-]	1,56							
Concrete pryout failure									
Factor for resistance to pry-out failure		k_8	[-]						
			2						

Concrete edge failure									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Outside diameter of fastener	d_{nom} [mm]	8	10	12	16	20	24	27	30
Effective length of fastener	l_f [mm]	$\min (l_{ef}, 8 d_{nom})$							

Sika AnchorFix®-3030**Performances**

Design according to EN 1992-4

Characteristic resistance for shear loads - threaded rod

Annex C 8**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09, ver. 2

1138

Table C11: Design method EN 1992-4

Characteristic values of resistance to shear load of threaded socket

Steel failure without lever arm							
Size		M6	M8	M10	M12	M16	M20
Nominal external diameter of socket		M10	M12	M16	M20	M24	M30
Steel grade 4.6	$V_{Rk,s}$ [kN]	5	9	14	20	38	59
Partial safety factor	γ_{Ms} [-]	1,67					
Steel grade 5.8	$V_{Rk,s}$ [kN]	6	11	17	25	47	74
Partial safety factor	γ_{Ms} [-]	1,25					
Steel grade 8.8	$V_{Rk,s}$ [kN]	8	15	23	34	63	98
Partial safety factor	γ_{Ms} [-]	1,25					
Steel grade 10.9	$V_{Rk,s}$ [kN]	10	18	29	42	79	123
Partial safety factor	γ_{Ms} [-]	1,5					
Stainless steel grade A2-70, A4-70	$V_{Rk,s}$ [kN]	7	13	20	30	55	86
Partial safety factor	γ_{Ms} [-]	1,56					
Stainless steel grade A4-80	$V_{Rk,s}$ [kN]	8	15	23	34	63	98
Partial safety factor	γ_{Ms} [-]	1,33					
Stainless steel grade 1.4529	$V_{Rk,s}$ [kN]	7	13	20	30	55	86
Partial safety factor	γ_{Ms} [-]	1,25					
Stainless steel grade 1.4565	$V_{Rk,s}$ [kN]	7	13	20	30	55	86
Partial safety factor	γ_{Ms} [-]	1,56					
Characteristic resistance of group of fasteners							
Ductility factor $k_7 = 1,0$ for steel with rupture elongation $A_5 > 8\%$							

Steel failure with lever arm							
Size		M6	M8	M10	M12	M16	M20
Nominal external diameter of socket		M10	M12	M16	M20	M24	M30
Steel grade 4.6	$M^o_{Rk,s}$ [N.m]	6	15	30	52	133	260
Partial safety factor	γ_{Ms} [-]	1,67					
Steel grade 5.8	$M^o_{Rk,s}$ [N.m]	8	19	37	66	166	325
Partial safety factor	γ_{Ms} [-]	1,25					
Steel grade 8.8	$M^o_{Rk,s}$ [N.m]	12	30	60	105	266	519
Partial safety factor	γ_{Ms} [-]	1,25					
Steel grade 10.9	$M^o_{Rk,s}$ [N.m]	15	37	75	131	333	649
Partial safety factor	γ_{Ms} [-]	1,50					
Stainless steel grade A2-70, A4-70	$M^o_{Rk,s}$ [N.m]	11	26	52	92	233	454
Partial safety factor	γ_{Ms} [-]	1,56					
Stainless steel grade A4-80	$M^o_{Rk,s}$ [N.m]	12	30	60	105	266	519
Partial safety factor	γ_{Ms} [-]	1,33					
Stainless steel grade 1.4529	$M^o_{Rk,s}$ [N.m]	11	26	52	92	233	454
Partial safety factor	γ_{Ms} [-]	1,25					
Stainless steel grade 1.4565	$M^o_{Rk,s}$ [N.m]	11	26	52	92	233	454
Partial safety factor	γ_{Ms} [-]	1,56					
Concrete pryout failure							
Factor for resistance to pry-out failure	k_8 [-]	2					

Concrete edge failure							
Size		M6	M8	M10	M12	M16	M20
Nominal external diameter of socket		M10	M12	M16	M20	M24	M30
Outside diameter of fastener	d_{nom} [mm]	10	12	16	20	24	30
Effective length of fastener	l_f [mm]	min (h_{ef} , 8 d_{nom})					

Sika AnchorFix®-3030**Performances**

Design according to EN 1992-4

Characteristic resistance for shear loads - threaded socket

Annex C 9**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09, ver. 2

1138

Table C12: Design method EN 1992-4

Characteristic values of resistance to shear load of rebar

Steel failure without lever arm								
Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	$V_{Rk,s}$ [kN]	14	22	31	55	86	135	221
Partial safety factor	γ_{Ms} [-]	1,5						
Characteristic resistance of group of fasteners								
Ductility factor	$k_7 = 1.0$ for steel with rupture elongation $A_5 > 8\%$							

Steel failure with lever arm								
Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	M ^o _{Rk,S} [N.m]	33	65	112	265	518	1013	2122
Partial safety factor	γ _{Ms} [-]	1,5						
Concrete pryout failure								
Factor for resistance to pry-out failure	k _o [-]	2						

Concrete edge failure								
Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Outside diameter of fastener	d_{nom} [mm]	8	10	12	16	20	25	32
Effective length of fastener	ℓ_t [mm]	$\min(h_{ef}, 8 d_{nom})$						

Sika AnchorFix®-3030**Performances**

Design according to EN 1992-4

Characteristic resistance for shear loads - rebar

Annex C 10**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C13: Displacement of threaded rod under tension and shear load
Hammer drilling, dustless drilling

Size		M8	M10	M12	M16	M20	M24	M27	M30
Tension load									
Uncracked concrete									
δ_{N0}	[mm/kN]	0,03	0,02	0,02	0,02	0,01	0,01	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,05	0,04	0,03	0,03	0,02	0,02	0,01	0,01
Cracked concrete									
δ_{N0}	[mm/kN]	0,05	0,04	0,03	0,03	0,02	0,02	0,02	0,02
$\delta_{N\infty}$	[mm/kN]	0,35	0,21	0,14	0,12	0,08	0,07	0,07	0,07
Shear load									
δ_{V0}	[mm/kN]	0,71	0,45	0,31	0,17	0,11	0,07	0,06	0,05
$\delta_{V\infty}$	[mm/kN]	1,06	0,67	0,46	0,25	0,16	0,11	0,08	0,07

Table C14: Displacement of threaded rod under tension and shear load
Diamond core drilling

Size		M8	M10	M12	M16	M20	M24	M27	M30
Tension load									
Uncracked concrete									
δ_{N0}	[mm/kN]	0,01	0,01	0,02	0,02	0,02	0,02	0,01	0,02
$\delta_{N\infty}$	[mm/kN]	0,09	0,07	0,05	0,04	0,03	0,02	0,02	0,02
Cracked concrete									
δ_{N0}	[mm/kN]	0,03	0,04	0,04	0,04	0,03	0,03	0,04	0,04
$\delta_{N\infty}$	[mm/kN]	0,33	0,28	0,20	0,14	0,12	0,09	0,09	0,08
Shear load									
δ_{V0}	[mm/kN]	0,71	0,45	0,31	0,17	0,11	0,07	0,06	0,05
$\delta_{V\infty}$	[mm/kN]	1,06	0,67	0,46	0,25	0,16	0,11	0,08	0,07

Table C15: Displacement of rebar under tension and shear load
Hammer drilling, dustless drilling

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Tension load								
Uncracked concrete								
δ_{N0}	[mm/kN]	0,04	0,03	0,02	0,01	0,01	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,08	0,05	0,04	0,02	0,02	0,01	0,01
Cracked concrete								
δ_{N0}	[mm/kN]	0,05	0,04	0,03	0,03	0,02	0,02	0,02
$\delta_{N\infty}$	[mm/kN]	0,35	0,21	0,17	0,11	0,08	0,07	0,06
Shear load								
δ_{V0}	[mm/kN]	0,38	0,24	0,17	0,10	0,06	0,04	0,02
$\delta_{V\infty}$	[mm/kN]	0,56	0,36	0,25	0,14	0,09	0,06	0,04

Table C16: Displacement of rebar under tension and shear load
Diamond drilling

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Tension load								
Uncracked concrete								
δ_{N0}	[mm/kN]	0,02	0,02	0,02	0,01	0,01	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,09	0,06	0,04	0,03	0,02	0,01	0,01
Cracked concrete								
δ_{N0}	[mm/kN]	0,04	0,03	0,03	0,02	0,02	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,39	0,26	0,18	0,10	0,07	0,04	0,03
Shear load								
δ_{V0}	[mm/kN]	0,38	0,24	0,17	0,10	0,06	0,04	0,02
$\delta_{V\infty}$	[mm/kN]	0,56	0,36	0,25	0,14	0,09	0,06	0,04

Sika AnchorFix®-3030

Performances
Displacements

Annex C 11

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C17: Seismic performance category C1 of threaded rod - Hammer drilling, Dustless drilling

Size			M8	M10	M12	M16	M20	M24	M27	M30
Tension load										
Steel failure										
Characteristic resistance grade 4.6	$N_{Rk,s,C1}$	[kN]	15	23	34	63	98	141	184	224
Partial safety factor	γ_{Ms}	[-]	2,00							
Characteristic resistance grade 5.8	$N_{Rk,s,C1}$	[kN]	18	29	42	79	123	177	230	281
Partial safety factor	γ_{Ms}	[-]	1,50							
Characteristic resistance grade 8.8	$N_{Rk,s,C1}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ_{Ms}	[-]	1,50							
Characteristic resistance grade 10.9	$N_{Rk,s,C1}$	[kN]	37	58	84	157	245	353	459	561
Partial safety factor	γ_{Ms}	[-]	1,40							
Characteristic resistance A2-70, A4-70	$N_{Rk,s,C1}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,87							
Characteristic resistance A4-80	$N_{Rk,s,C1}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ_{Ms}	[-]	1,60							
Characteristic resistance 1.4529	$N_{Rk,s,C1}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,50							
Characteristic resistance 1.4565	$N_{Rk,s,C1}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ_{Ms}	[-]	1,87							
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years										
Characteristic bond resistance										
Temperature T3: 50°C / 70°C	$TR_{k,p,C1}$	[N/mm ²]	9,4	8,5	10,0	8,7	7,4	7,7	5,7	4,9
Temperature T4: 55°C / 75°C	$TR_{k,p,C1}$	[N/mm ²]	9,1	8,2	10,0	8,4	7,2	7,5	5,5	4,7
Installation safety factor										
Dry, wet concrete	γ_{inst}	[-]	1,0							
Hammer drilling – Flooded hole	γ_{inst}	[-]	1,0							
Dustless drilling – Flooded hole	γ_{inst}	[-]	1,2							
Shear load										
Steel failure without lever arm										
Characteristic resistance grade 4.6	$V_{Rk,s,C1}$	[kN]	5	9	13	20	32	28	37	45
Partial safety factor	γ_{Ms}	[-]	1,67							
Characteristic resistance grade 5.8	$V_{Rk,s,C1}$	[kN]	7	11	16	26	40	35	46	56
Partial safety factor	γ_{Ms}	[-]	1,25							
Characteristic resistance grade 8.8	$V_{Rk,s,C1}$	[kN]	11	17	25	41	64	56	73	90
Partial safety factor	γ_{Ms}	[-]	1,25							
Characteristic resistance grade 10.9	$V_{Rk,s,C1}$	[kN]	14	22	32	51	80	71	92	112
Partial safety factor	γ_{Ms}	[-]	1,50							
Characteristic resistance A2-70, A4-70	$V_{Rk,s,C1}$	[kN]	10	15	22	36	56	49	64	79
Partial safety factor	γ_{Ms}	[-]	1,56							
Characteristic resistance A4-80	$V_{Rk,s,C1}$	[kN]	11	17	25	41	64	56	73	90
Partial safety factor	γ_{Ms}	[-]	1,33							
Characteristic resistance 1.4529	$V_{Rk,s,C1}$	[kN]	10	15	22	36	56	49	64	79
Partial safety factor	γ_{Ms}	[-]	1,25							
Characteristic resistance 1.4565	$V_{Rk,s,C1}$	[kN]	10	15	22	36	56	49	64	79
Partial safety factor	γ_{Ms}	[-]	1,56							
Characteristic shear load resistance $V_{Rk,s,eq}$ in the Table C13 shall be multiplied by following reduction factor for hot-dip galvanized commercial standard rods										
Reduction factor for hot-dip galvanized rods	$\alpha_{v,h-dg,c1}$	[-]	0,47	0,47	0,47	0,54	0,54	0,88	0,88	0,88
Factor for annular gap without filling gap	α_{gap}	[-]	0,5							
Factor for annular gap with filling gap	α_{gap}	[-]	1,0							

The anchor shall be used with minimum rupture elongation after fracture $A_5 \geq 9\%$.

Sika AnchorFix®-3030

Performances

Hammer drilling, Dustless drilling

Seismic performance category C1 of threaded rod

Annex C 12

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Table C18: Seismic performance category C1 of rebar - Hammer drilling, Dustless drilling

Size			Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Tension load								
Steel failure								
Rebar BST 500 S	$N_{Rk,s,C1}$	[kN]	43	62	111	173	270	442
Partial safety factor	γ_{Ms}	[-]	1,4					
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years								
Characteristic bond resistance								
Temperature T3: 50°C / 70°C	$T_{Rk,p,C1}$	[N/mm ²]	9,4	9,8	9,5	8,8	8,0	5,3
Temperature T4: 55°C / 75°C	$T_{Rk,p,C1}$	[N/mm ²]	9,1	9,5	9,2	8,5	7,7	5,2
Installation safety factor								
Hammer drilling - Dry, wet concrete	γ_{inst}	[-]	1,0					
Dustless drilling - Dry, wet concrete	γ_{inst}	[-]	1,2					
Flooded hole	γ_{inst}	[-]	1,2					
Shear load								
Steel failure without lever arm								
Rebar BST 500 S	$V_{Rk,s,C1}$	[kN]	16	23	41	69	67	111
Partial safety factor	γ_{Ms}	[-]	1,5					
Factor for annular gap without filling gap	α_{gap}	[-]	0,5					
Factor for annular gap with filling gap	α_{gap}	[-]	1,0					

Sika AnchorFix®-3030**Performances**

Hammer drilling, Dustless drilling
 Seismic performance category C1 of rebar

Annex C 13**Declaration of Performance**

Sika AnchorFix®-3030
 68247540
 2025.09 , ver. 2
 1138

Table C19: Seismic performance category C2 of threaded rod - Hammer drilling, Dustless drilling

Size			M12	M16	M20
Tension load					
Steel failure					
Characteristic resistance grade 4.6	$N_{Rk,s,C2}$	[kN]	34	63	98
Partial safety factor	γ_{Ms}	[-]		2,00	
Characteristic resistance grade 5.8	$N_{Rk,s,C2}$	[kN]	42	79	123
Partial safety factor	γ_{Ms}	[-]		1,50	
Characteristic resistance grade 8.8	$N_{Rk,s,C2}$	[kN]	67	126	196
Partial safety factor	γ_{Ms}	[-]		1,50	
Characteristic resistance grade 10.9	$N_{Rk,s,C2}$	[kN]	84	157	245
Partial safety factor	γ_{Ms}	[-]		1,40	
Characteristic resistance A2-70, A4-70	$N_{Rk,s,C2}$	[kN]	59	110	172
Partial safety factor	γ_{Ms}	[-]		1,87	
Characteristic resistance A4-80	$N_{Rk,s,C2}$	[kN]	67	126	196
Partial safety factor	γ_{Ms}	[-]		1,60	
Characteristic resistance 1.4529	$N_{Rk,s,C2}$	[kN]	59	110	172
Partial safety factor	γ_{Ms}	[-]		1,50	
Characteristic resistance 1.4565	$N_{Rk,s,C2}$	[kN]	59	110	172
Partial safety factor	γ_{Ms}	[-]		1,87	
Combined pullout and concrete cone failure in concrete C20/25 for a working life of 50 years and 100 years					
Characteristic bond resistance					
Temperature T3: 50°C / 70°C	$TR_{k,p,C2}$	[N/mm ²]	3,5	4,0	4,5
Temperature T4: 55°C / 75°C	$TR_{k,p,C2}$	[N/mm ²]	3,3	3,8	4,4
Installation safety factor	γ_{inst}	[-]		1,0	
Dry and wet concrete, Flooded hole	γ_{inst}	[-]		1,0	
Dustless drilling – Flooded hole	γ_{inst}	[-]		1,2	
Shear load					
Steel failure without lever arm					
Characteristic resistance grade 4.6	$V_{Rk,s,C2}$	[kN]	13	18	28
Partial safety factor	γ_{Ms}	[-]		1,67	
Characteristic resistance grade 5.8	$V_{Rk,s,C2}$	[kN]	16	22	35
Partial safety factor	γ_{Ms}	[-]		1,25	
Characteristic resistance grade 8.8	$V_{Rk,s,C2}$	[kN]	25	36	56
Partial safety factor	γ_{Ms}	[-]		1,25	
Characteristic resistance grade 10.9	$V_{Rk,s,C2}$	[kN]	32	45	70
Partial safety factor	γ_{Ms}	[-]		1,50	
Characteristic resistance A2-70, A4-70	$V_{Rk,s,C2}$	[kN]	22	31	49
Partial safety factor	γ_{Ms}	[-]		1,56	
Characteristic resistance A4-80	$V_{Rk,s,C2}$	[kN]	25	36	56
Partial safety factor	γ_{Ms}	[-]		1,33	
Characteristic resistance 1.4529	$V_{Rk,s,C2}$	[kN]	22	31	49
Partial safety factor	γ_{Ms}	[-]		1,25	
Characteristic resistance 1.4565	$V_{Rk,s,C2}$	[kN]	22	31	49
Partial safety factor	γ_{Ms}	[-]		1,56	
Characteristic shear load resistance $V_{Rk,s,eq}$ in the Table C15 shall be multiplied by following reduction factor for hot-dip galvanized commercial standard rods					
Reduction factor for hot-dip galvanized rods	$\alpha_{v,h-dg,c2}$	[-]	0,46	0,61	0,61
Factor for annular gap without filling gap	α_{gap}	[-]		0,5	
Factor for annular gap with filling gap	α_{gap}	[-]		1,0	

Table C20: Displacement under tensile and shear load - seismic category C2 of threaded rod

Size		M12	M16	M20
$\delta_{N,C2(50\%)}$	[mm]	0,20	0,40	0,77
$\delta_{N,C2(100\%)}$	[mm]	0,76	0,74	1,68
$\delta_{V,C2(50\%)}$	[mm]	5,29	4,12	4,94
$\delta_{V,C2(100\%)}$	[mm]	10,20	9,05	10,99

The anchor shall be used with minimum rupture elongation after fracture $A_5 \geq 9\%$.

Sika AnchorFix®-3030**Performances**

Hammer drilling, Dustless drilling
Seismic performance category C2 of threaded rod

Annex C 14**Declaration of Performance**

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Characteristic resistance to combined pull-out and concrete failure $\tau_{Rk,fi}(\theta)$ under fire exposure for threaded rods for hammer or dustless drilling

The characteristic resistance to combined pull-out and concrete failure under fire $\tau_{Rk,fi,p}(\theta)$ shall be determined according to following equation:

$$\tau_{Rk,fi,p}(\theta) = k_{fi,p}(\theta) \cdot \tau_{Rk,cr}$$


where:

$$\begin{aligned} k_{fi,p}(\theta) &= 1 && \text{for } \theta < \theta_k \\ k_{fi,p}(\theta) &= 95,988 \cdot \theta^{-1,452} \leq 1 && \text{for } \theta \leq \theta_{max} \\ k_{fi,p}(\theta) &= 0 && \text{for } \theta > \theta_{max} \end{aligned}$$

$$\begin{aligned} \theta_k &= 21^{\circ}\text{C} \\ \theta_{max} &= 326^{\circ}\text{C} \end{aligned}$$

- $\tau_{Rk,fi,p}$ = characteristic bond resistance for cracked concrete under fire exposure for given temperature (θ)
 $\tau_{Rk,cr}$ = characteristic bond resistance for cracked concrete for concrete strength class C20/25
 $k_{fi,p}(\theta)$ = reduction factor for bond resistance under fire conditions

Figure C1: Reduction factor $k_{fi,p}(\theta)$

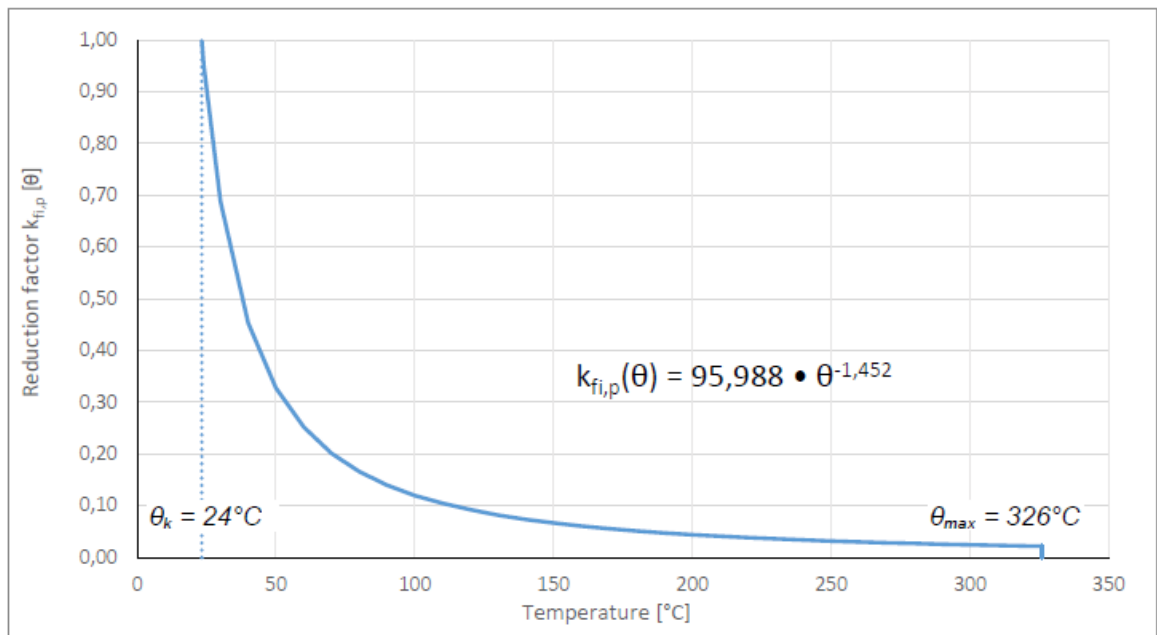

Sika AnchorFix®-3030

Performances

Bond resistance under fire conditions

Annex C 15

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

Table C21: Steel failure - Characteristic resistance under tension load under fire conditions for threaded rod

Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade: 4.6; 5.8; 8.8; 10.9	$N_{Rk,s,fi}(30)$ [kN]	0,37	0,87	1,69	3,14	4,90	7,06	9,18	11,22
	$N_{Rk,s,fi}(60)$ [kN]	0,33	0,75	1,26	2,36	3,68	5,30	6,89	8,42
	$N_{Rk,s,fi}(90)$ [kN]	0,26	0,58	1,10	2,04	3,19	4,59	5,97	7,29
	$N_{Rk,s,fi}(120)$ [kN]	0,18	0,46	0,84	1,57	2,45	3,53	4,59	5,61
Stainless steel grade: A2-70; A4-70; A4-80 High corrosion resistant steel grade: 1.4529; 1.4565	$N_{Rk,s,fi}(30)$ [kN]	0,73	1,45	2,53	4,71	7,35	10,59	13,77	16,83
	$N_{Rk,s,fi}(60)$ [kN]	0,59	1,16	2,11	3,93	6,13	8,83	11,48	14,03
	$N_{Rk,s,fi}(90)$ [kN]	0,44	0,93	1,69	3,14	4,90	7,06	9,18	11,22
	$N_{Rk,s,fi}(120)$ [kN]	0,37	0,81	1,35	2,51	3,92	5,65	7,34	8,98

Table C22: Steel failure - Characteristic resistance under tension load under fire conditions for rebar

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	$N_{Rk,s,fi}(30)$ [kN]	0,50	1,18	2,26	4,02	6,28	9,82	16,08
	$N_{Rk,s,fi}(60)$ [kN]	0,45	1,02	1,70	3,02	4,71	7,36	12,06
	$N_{Rk,s,fi}(90)$ [kN]	0,35	0,79	1,47	2,61	4,08	6,38	10,45
	$N_{Rk,s,fi}(120)$ [kN]	0,25	0,63	1,13	2,01	3,14	4,91	8,04

Table C23: Steel failure - Characteristic resistance under shear load under fire conditions for threaded rod

Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade: 4.6; 5.8; 8.8; 10.9	$V_{Rk,s,fi}(30)$ [kN]	0,37	0,87	1,69	3,14	4,90	7,06	9,18	11,22
	$V_{Rk,s,fi}(60)$ [kN]	0,33	0,75	1,26	2,36	3,68	5,30	6,89	8,42
	$V_{Rk,s,fi}(90)$ [kN]	0,26	0,58	1,10	2,04	3,19	4,59	5,97	7,29
	$V_{Rk,s,fi}(120)$ [kN]	0,18	0,46	0,84	1,57	2,45	3,53	4,59	5,61
	$M^0_{Rk,s,fi}(30)$ [N.m]	0,4	1,1	2,6	6,7	13,0	22,5	33,3	45,0
	$M^0_{Rk,s,fi}(60)$ [N.m]	0,3	1,0	2,0	5,0	9,7	16,8	25,0	33,7
	$M^0_{Rk,s,fi}(90)$ [N.m]	0,3	0,7	1,7	4,3	8,4	14,6	21,6	29,2
	$M^0_{Rk,s,fi}(120)$ [N.m]	0,2	0,6	1,3	3,3	6,5	11,2	16,6	22,5
Stainless steel grade: A2-70; A4-70; A4-80 High corrosion resistant steel grade: 1.4529; 1.4565	$V_{Rk,s,fi}(30)$ [kN]	0,73	1,45	2,53	4,71	7,35	10,59	13,77	16,83
	$V_{Rk,s,fi}(60)$ [kN]	0,59	1,16	2,11	3,93	6,13	8,83	11,48	14,03
	$V_{Rk,s,fi}(90)$ [kN]	0,44	0,93	1,69	3,14	4,90	7,06	9,18	11,22
	$V_{Rk,s,fi}(120)$ [kN]	0,37	0,81	1,35	2,51	3,92	5,65	7,34	8,98
	$M^0_{Rk,s,fi}(30)$ [N.m]	0,7	1,9	3,9	10,0	19,5	33,7	49,9	67,5
	$M^0_{Rk,s,fi}(60)$ [N.m]	0,6	1,5	3,3	8,3	16,2	28,1	41,6	56,2
	$M^0_{Rk,s,fi}(90)$ [N.m]	0,4	1,2	2,6	6,7	13,0	22,5	33,3	45,0
	$M^0_{Rk,s,fi}(120)$ [N.m]	0,4	1,0	2,1	5,3	10,4	18,0	26,6	36,0

Table C24: Steel failure - Characteristic resistance under shear load under fire conditions for rebar

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	$V_{Rk,s,fi}(30)$ [kN]	0,50	1,18	2,26	4,02	6,28	9,82	16,08
	$V_{Rk,s,fi}(60)$ [kN]	0,45	1,02	1,70	3,02	4,71	7,36	12,06
	$V_{Rk,s,fi}(90)$ [kN]	0,35	0,79	1,47	2,61	4,08	6,38	10,45
	$V_{Rk,s,fi}(120)$ [kN]	0,25	0,63	1,13	2,01	3,14	4,91	8,04
	$M^0_{Rk,s,fi}(30)$ [N.m]	0,6	1,8	4,1	9,7	18,9	36,8	77,2
	$M^0_{Rk,s,fi}(60)$ [N.m]	0,5	1,5	3,1	7,2	14,1	27,6	57,9
	$M^0_{Rk,s,fi}(90)$ [N.m]	0,4	1,2	2,6	6,3	12,3	23,9	50,2
	$M^0_{Rk,s,fi}(120)$ [N.m]	0,3	0,9	2,0	4,8	9,4	18,4	38,6

Sika AnchorFix®-3030

Performances

Bond resistance under fire conditions

Annex C 16

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

Specifications of intended use

Anchorage subject to:

- Static and quasi-static load:
 - threaded rod
 - threaded socket
 - rebar
- Seismic actions category C1 (max w = 0,5 mm):
 - threaded rod size M8, M10, M12, M16, M20, M24, M27, M30
 - rebar size Ø10, Ø12, Ø16, Ø20, Ø24, Ø25, Ø32
- Seismic actions category C2 (max w = 0,8 mm):
 - threaded rod size M12, M16, M20

Base materials

- Cracked and uncracked concrete
- Reinforced or unreinforced normal weight concrete without fibres of strength class C20/25 at minimum and C50/60 at maximum according EN 206:2013 + A2:2021.

Temperature range:

- T3: -40°C to +70°C (max. short. term temperature +70°C and max. long term temperature +50°C)
- T4: -40°C to +75°C (max. short. term temperature +75°C and max. long term temperature +55°C)

Use conditions (Environmental conditions)

- Structures subject to dry, internal conditions (all materials)
- For all other conditions according to EN 1993-1-4 corresponding to corrosion resistance class:
 - Stainless steel A2 according to Annex A 4, Table A1: CRC II
 - Stainless steel A4 according to Annex A 4, Table A1: CRC III
 - High corrosion resistance steel HCR according to Annex A 4, Table A1: CRC V

Concrete conditions:

- I1 – installation in dry or wet (water saturated) concrete and use in service in dry or wet concrete.
- I2 – installation in water-filled (not sea water) and use in service in dry or wet concrete

Design:

- The anchorages are designed in accordance with the EN 1992-4 under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings.
- Anchorages under seismic actions (cracked concrete) are designed in accordance with EN 1992-4.
- Anchorages under fire exposure are designed in accordance with EOTA TR 082.

Installation:

- Hole drilling by hammer drilling, dustless drilling or diamond core drilling mode.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

Installation direction:

- D3 – downward and horizontal and upwards (e.g. overhead) installation

Sika AnchorFix®-3030	Annex B 1
Intended use Specifications	

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138

EAD 330499-02-0601; edition September 2022 (ETA 17/0694 of 09/09/2025)
Bonded injection type anchor for use in cracked and uncracked concrete

<http://dop.sika.com>

Declaration of Performance

Sika AnchorFix®-3030

68247540

2025.09 , ver. 2

1138

CE MARKING TO BE PLACED ON THE LABEL

 21
Sika Services AG, Zurich, Switzerland
DoP No. 68247540
Notified Body 1020
For detailed performance see accompanying documents and ETA 17/0694 of 09/09/2025
EAD 330499-02-0601; edition September 2022
Bonded injection type anchor for use in cracked and uncracked concrete

<http://dop.sika.com>

ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH)

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

LEGAL NOTE

Any information provided in this Declaration of Performance ("DoP"), including any descriptions and recommendations relating to the application and end-use of any Sika products ("Products"), are given in good faith based on Sika's current knowledge and experience of the Products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. Please note that the materials, substrates and actual site conditions may vary considerably, and therefore Sika makes no warranty for merchantability or fitness for a particular purpose, and accepts no liability for the application and use of the Products, for any recommendations, or for any advice offered. Prior to using, the Product must be tested for its suitability for the intended application and purpose, and the most recent version of the Product Data Sheet must be consulted. Sika reserves the right to change the properties of its Products any time without prior notice. Any orders for Products or services provided by Sika are subject to Sika's current terms and conditions of sale.

Declaration of Performance

Sika AnchorFix®-3030
68247540
2025.09 , ver. 2
1138