



Section - Side View

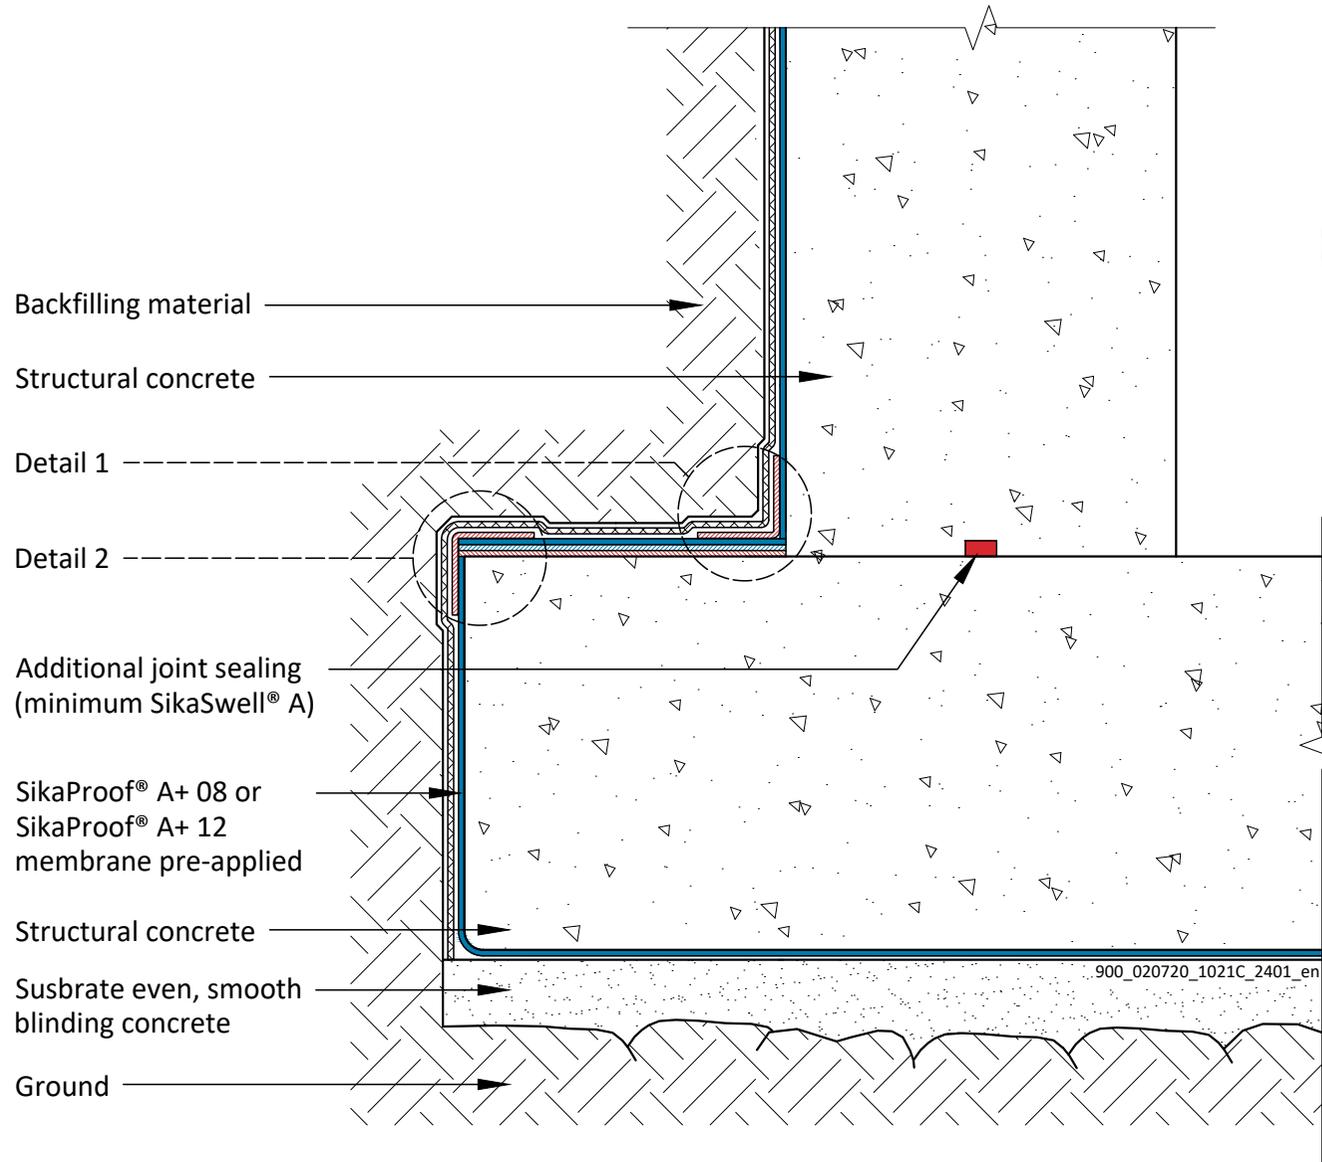


Detail 1

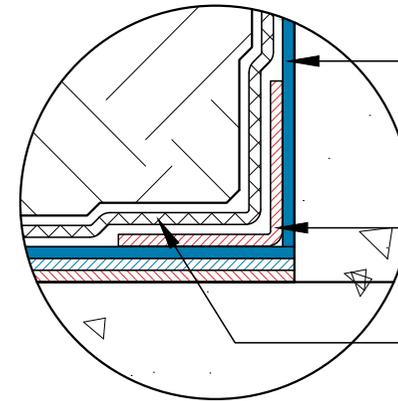

- SikaProof® A+ 08 or SikaProof® A+ 12 membrane pre-applied
- SikaProof® ExTape-100
- Protection layer or geotextile minimum 300 g/m² (depending on backfilling material)

Detail 2

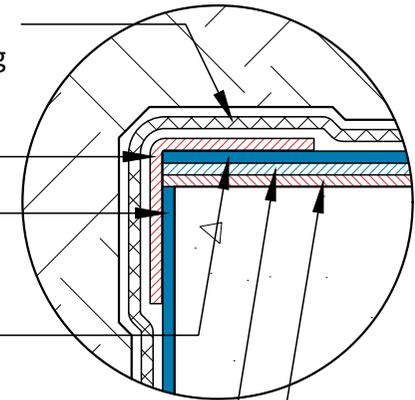

- Protection layer or geotextile minimum 300 g/m² (depending on backfilling material)
- SikaProof® ExTape-100
- SikaProof® A+ 08 or SikaProof® A+ 12 membrane pre-applied
- SikaProof® A+ 08 or SikaProof® A+ 12 membrane post-applied
- SikaProof® Adhesive-02
- SikaProof® Primer-02

SikaProof® A+ 08 or SikaProof® A+ 12 – TRANSITION BASE SLAB TO WALL WITH TOE

With pre-applied and post-applied system

Sika General Detail

900_020720_1021C_2401_en
January 2024

Sika Services AG

Tüffenwies 16
8048 Zürich
Switzerland

Tel: +41 584364040

www.sika.com

BUILDING TRUST



DRAWING MUST ALWAYS BE REVIEWED BY A DESIGN SPECIALIST AND IF NECESSARY MODIFIED TO ENSURE SUITABILITY FOR THE SPECIFIC APPLICATION

The information contained herein and any other advice are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. The information only applies to the application(s) and product(s) expressly referred to herein and is based on laboratory tests which do not replace practical tests. In case of changes in the parameters of the application, such as changes in substrates etc., or in case of a different application, consult Sika's Technical Service prior to using Sika products. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.